



Anti-vibration carbide end mills

AE-VM SERIES

AE-VTSS · AE-VMS · AE-VMSS · AE-VML · AE-VMFE

Volume 11

NEW AE-VTSS
Anti-Vibration Carbide End Mill
Compatible with Sliding
Head Lathes
Available from dia.3 to 12



NEW
AE-VTSS Short

| | | |
|------------------------------|------|-----|
| Features & Cutting Data..... | PAGE | 4~5 |
| Dimensions | PAGE | 14 |
| Cutting Condition | PAGE | 25 |

AE-VMS Short

| | | |
|---------------------------------------|------|-------|
| Features | PAGE | 6~9 |
| Dimensions Square & Radius Type | PAGE | 15~16 |
| Dimensions RA - Right Angle Type..... | PAGE | 17 |
| Cutting Condition | PAGE | 26~27 |
| Cutting Data | PAGE | 33~35 |

AE-VMSS Stub

| | | |
|--|------|-------|
| Features | PAGE | 6~9 |
| Dimensions Square Type | PAGE | 18~19 |
| Dimensions RA - Right Angle Type | PAGE | 20 |
| Dimensions Long Neck Type | PAGE | 21 |
| Cutting Condition | PAGE | 28~29 |

AE-VML Long

| | | |
|---------------------------------------|------|-------|
| Features | PAGE | 10~11 |
| Dimensions Square & Radius Type | PAGE | 22 |
| Cutting Condition | PAGE | 30~31 |
| Cutting Data | PAGE | 36 |


AE-VML Chipbreaker Type

| | | |
|-------------------------|------|-------|
| Dimension | PAGE | 23 |
| Cutting Condition | PAGE | 30~31 |
| Cutting Data | PAGE | 37 |







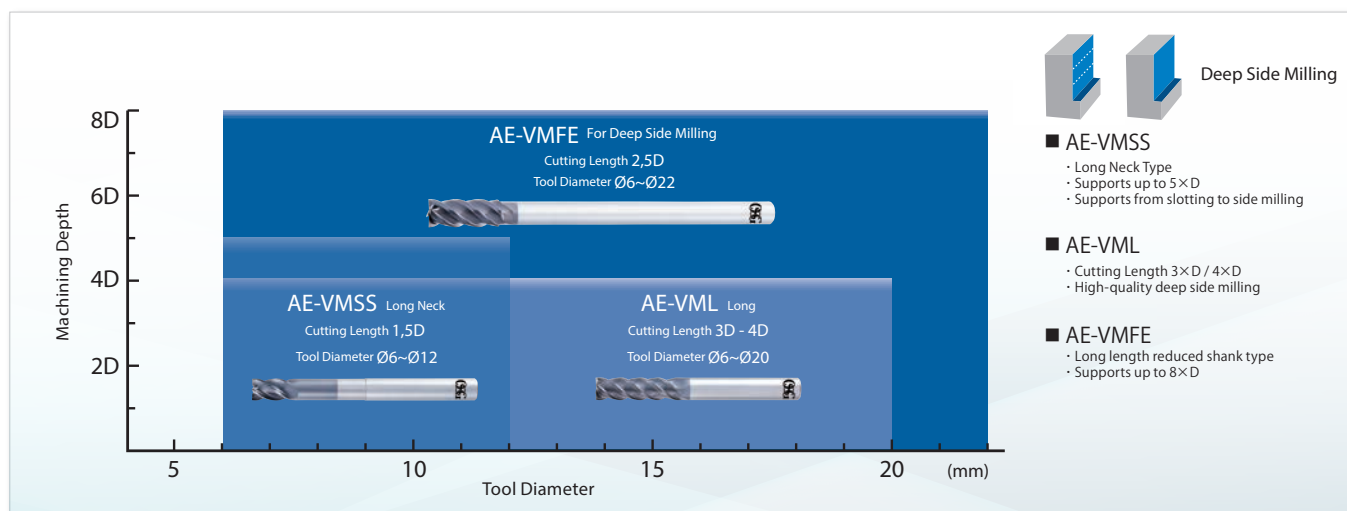































NEW
AE-VMFE For Deep Side Milling


























| | | |
|---------------------------------------|------|-------|
| Features | PAGE | 12~13 |
| Dimensions Square & Radius Type | PAGE | 24 |
| Cutting Condition | PAGE | 32 |

Product Lineup for Deep Side Milling



SELECTION CHART


| | | Cutting edge shape | Application | | | | | |
|--------------|-------------|---|---|---|---|---|---|---|
| AE-VMS Short | Square |  |  |  |  |  |  | |
| | Page 15-16 | | Slot Milling | Side Milling | Helical Milling | Contour Milling | Ramping | |
| | Right Angle |  |  |  |  |  |  | |
| Page 17 | | Slot Milling | Side Milling | Helical Milling | Contour Milling | Ramping | | |
| AE-VMS Short | Radius |  |  |  |  |  |  |  |
| | Page 15-16 | | Slot Milling | Side Milling | Helical Milling | Side Milling | Ramping | Copying |
| AE-VMSS Stub | Square |  |  |  |  |  |  | |
| | Page 18-19 | | Slot Milling | Side Milling | Helical Milling | Contour Milling | Ramping | |
| | Right Angle |  |  |  |  |  |  | |
| Page 20 | | Slot Milling | Side Milling | Helical Milling | Contour Milling | Ramping | | |
| AE-VMSS Stub | Long Neck |  |  |  |  |  |  |  |
| | Page 21 | | Slot Milling | Side Milling | Helical Milling | Contour Milling | Ramping | Deep Side |

| | | Cutting edge shape | Application | | | | | |
|-------------------------------|-------------------------|---|---|---|---|---|--|--|
| AE-VML Long | Square |  |  |  |  |  | | |
| | Page 22 | | Trochoidal | Side Milling | Helical Milling | Deep Side | | |
| | Radius |  |  |  |  |  | | |
| Page 22 | | Trochoidal | Side Milling | Helical Milling | Deep Side | | | |
| AE-VML Long | Square with Chipbreaker |  |  |  |  |  | | |
| | Page 21 | | Trochoidal | Side Milling | Helical Milling | Deep Side | | |
| AE-VMFE For deep side milling | Square |  NEW |  |  |  |  | | |
| | Page 24 | | Trochoidal | Side Milling | Helical Milling | Deep Side | | |
| AE-VMFE For deep side milling | Radius |  NEW |  |  |  |  | | |
| | Page 24 | | Trochoidal | Side Milling | Helical Milling | Deep Side | | |


Right angle type for milling straight corners

Right angle implies "straight angle." The right angle type end mill features a unique geometry that maintains a consistent cutting diameter even with a gash land.

Ability to mill straight corners while maintaining cutting edge rigidity.



Right Angle Type



Square Type

KEY FEATURES: AE-VTSS

1 Anti-Vibration Carbide End Mill
Compatible with Sliding
Head Lathes

2 Length of cut $1,5 \times D$ or less
 $\text{Ø}3\sim\text{Ø}5$: $1,5 \times D$ or less
 $\text{Ø}6\sim\text{Ø}12$: $1 \times D$


3 Overall length 50mm or less
 $\text{Ø}3 \sim \text{Ø}10$: 45mm
 $\text{Ø}12$: 50mm




AE-VTSS: THE A-BRAND END MILL

Multi-functional and highly efficient machining 3-flute specification and bottom cutting edge hook shape


Stable chip shape and improved chip evacuation
Can be used for a wide variety of processing such as plunging

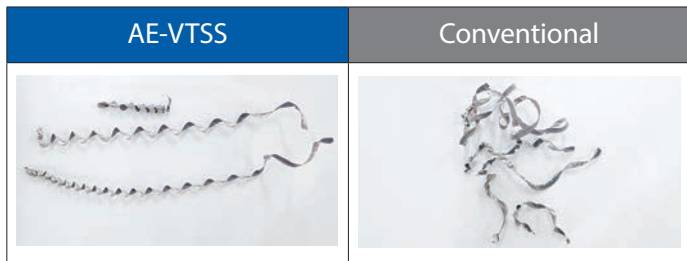

Chip shape from plunging Work Material : SUS304

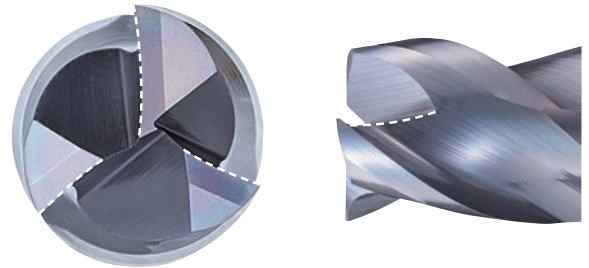

Unequal spacing of teeth and variable-lead geometry

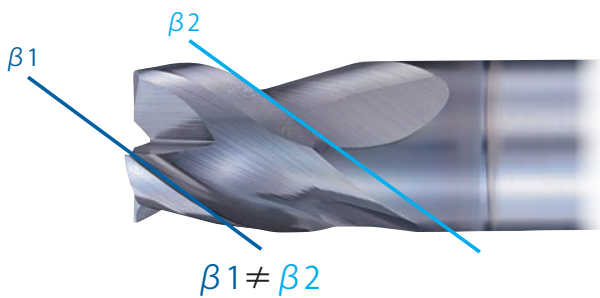


Stable and high efficiency milling is made possible by the suppression of chattering

CUTTING DATA

Work Material: SCM435
Bar Material Ø12
Machine: CNC sliding head lathe
Coolant: None
Dry machining is used for filming purposes

| Milling Part | Milling Process | Milling Method | Tool | Cutting Speed (m/min) | Feed (mm/min) | ap (mm) | ae (mm) |
|--------------|-----------------|-------------------------|-------------|------------------------------|-------------------|-------------|---------|
| Face | Roughing | D-cut (Frontal Milling) | AE-VTSS Ø12 | 90 (2,400min ⁻¹) | 200 (0.028mm/t) | 1,4×2 times | 9,8 |
| | Finishing | | | | | 0,2 | 10 |
| Slot | Roughing | Plunging | AE-VTSS Ø4 | 70 (5,600min ⁻¹) | 115 (0.021mm/rev) | 1,2 | — |
| | | Slot Milling | | | 500 (0.03mm/t) | 1,2 | 4 |
| | Finishing | Plunging | | | 115 (0.021mm/rev) | 0,1 | — |
| | | Slot Milling | | | 500 (0.03mm/t) | 0,1 | 4 |

Processed shape

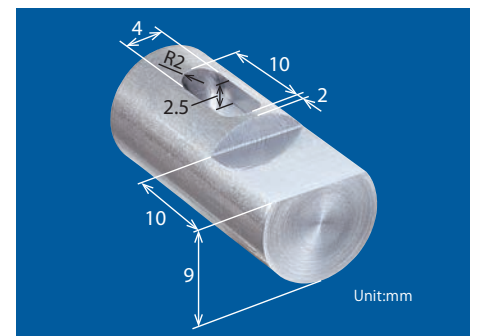

For roughing of the slot, the same machining is performed twice to secure a depth of 2.5mm.

Scan code for video



KEY FEATURES: AE-VMS • AE-VMSS



1 Dularise coating

2 Positive rake angle

3 New flute form

4 High rigidity



5 Solid carbide



AE-VMS: THE A-BRAND END MILL

Duarise coating

The new duarise coating provides excellent lubricity, superior friction-resistance and high oxidation temperature. Multi-layer construction minimizes the thermal cracks that often occurred while using water-soluble oil.

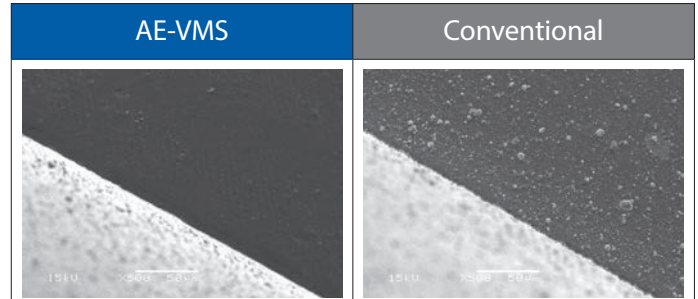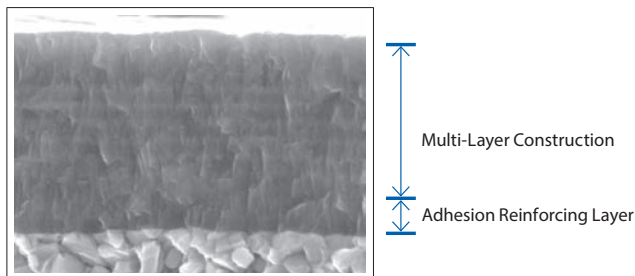

Smoothing surface coating treatment made an excellent quality of surface finishing.

Positive rake angle

A stable performance is gathered by reducing cutting forces as a result of a sharp and positive rake angle.

New flute form

The new flute form with its excellent chip evacuation properties enables stable milling and the suppression of burrs.

Figure 1. 10% lower cutting force versus the competitors



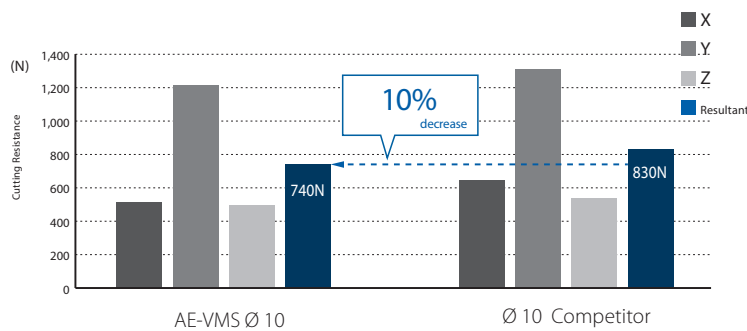


Figure 2. Stable performance even when the overhang length is L/D=4

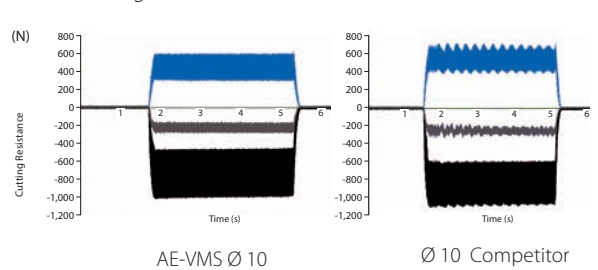

High rigidity


The unequal spacing of teeth and variable-lead geometry enables stable and high efficiency milling and the suppression of vibration.

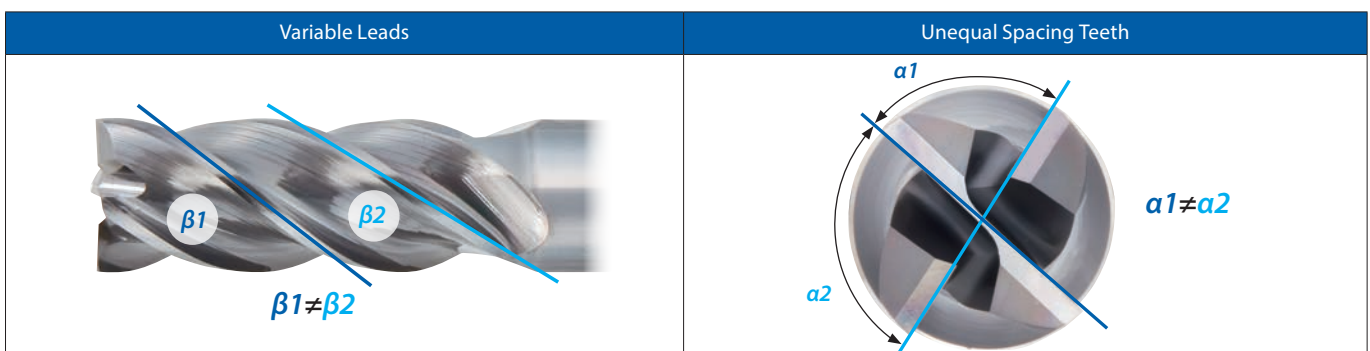


AE-VMSS-~~AE-VMS~~: (-RA) RIGHT ANGLE TYPE

Milling straight corners with a unique cutting edge

Gash land for enhancing chipping resistance

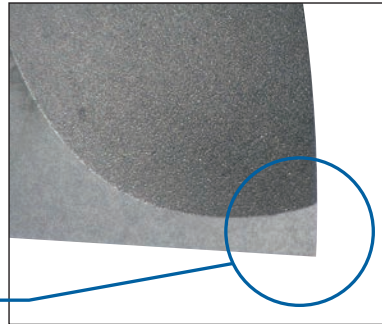


With gash land



Straight corner with no uncut residue




Ability to mill straight corners while maintaining cutting edge rigidity

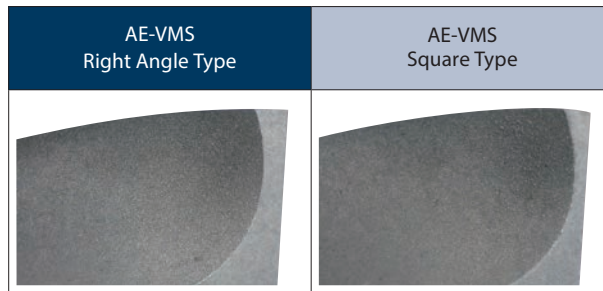

Although the right angle type end mill includes a gash land, it is able to mill straight corners due to its unique geometry that maintains a consistent cutting diameter.

Measured value of change in cutting edge of Ø6 end mill

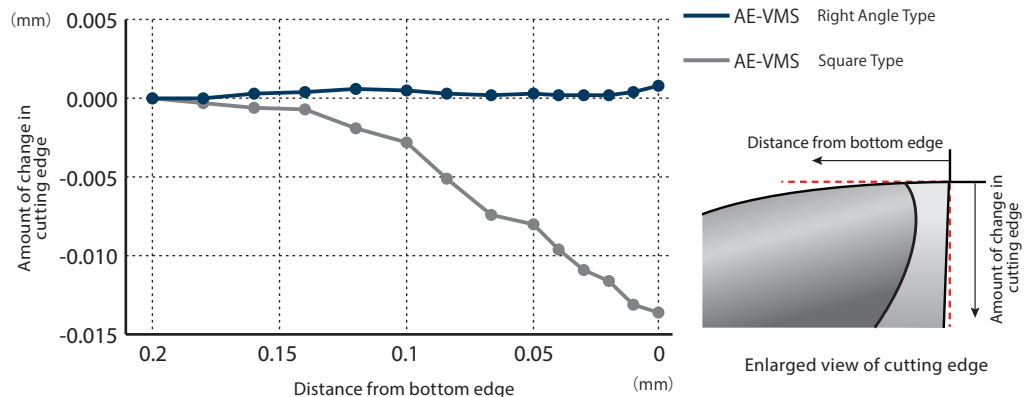


* The values measured are internal data. The amount of change in the cutting edge may vary depending on the individual product.

AE-VMSS=AE-VMS: (-RA) RIGHT ANGLE TYPE

High milling quality Straight corner

The milling of straight corners with no uncut residue is made possible by a unique cutting edge

| | |
|----------------|----------------------------------|
| Tool | AE-VMS Ø 3 - Right Angle |
| Work Material | S50C |
| Milling Method | Side Milling |
| Cutting Speed | Vc=91m/min (9.660min-1) |
| Feed | Vf=1.160mm/min (0,03mm/t) |
| Depth of Cut | ap=4,5mm(1,5D) ae=0,6mm(0,2D) |
| Coolant | Air Blow |

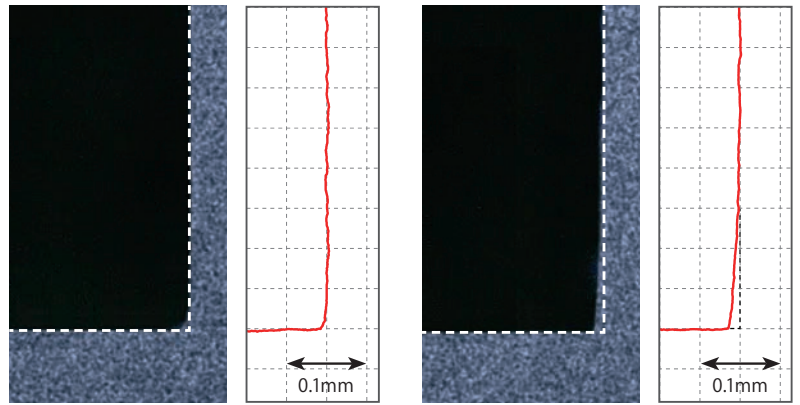


AE-VMS
Right Angle Type

AE-VMS
Square Type

Stable Performance Cutting edge rigidity

Normal progress of wear without chipping due to the gash land

| | |
|----------------|--------------------------------|
| Tool | AE-VMS Ø 6 - Right Angle |
| Work Material | S50C |
| Milling Method | Side Milling |
| Cutting Speed | Vc=130 m/min (6.900min-1) |
| Feed | Vf=1.380mm/min (0,05mm/t) |
| Depth of Cut | ap=9mm(1,5D) ae=1,2mm(0,2D) |
| Coolant | Air Blow |

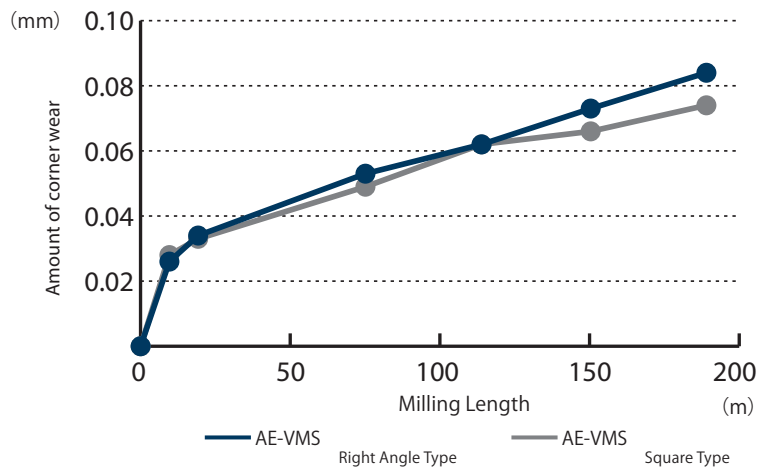

Milling | Solid carbide



KEY FEATURES: AE-VML

1 Dularise coating

2 Microrelief geometry


3 For high-speed side milling

4 Long flutes

5 Solid carbide



AE-VML: ULTIMATE SIDE MILLING EFFICIENCY

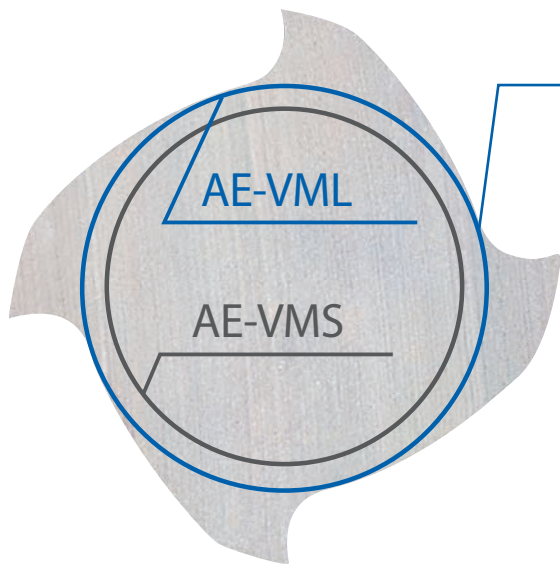

High Rigidity



High-speed side milling is made possible by the large thick core design. The web taper geometry, where the thickness of core changes from the cutting edge to the shank, greatly improves tool rigidity, thereby prevents the machining surface from tilting

High Helix


Reduces cutting force to enable stable milling

Suppression of vibration

The combination of variable lead, unequal spacing teeth and microrelief geometry contributes to stable and high efficiency milling performance.

| Variable Leads | Unequal Spacing Teeth | Microrelief |
|----------------|-----------------------|-------------|
| | | |

Chattering is greatly suppressed even during high-speed, high-depth milling, resulting in unrivaled high efficiency performance.

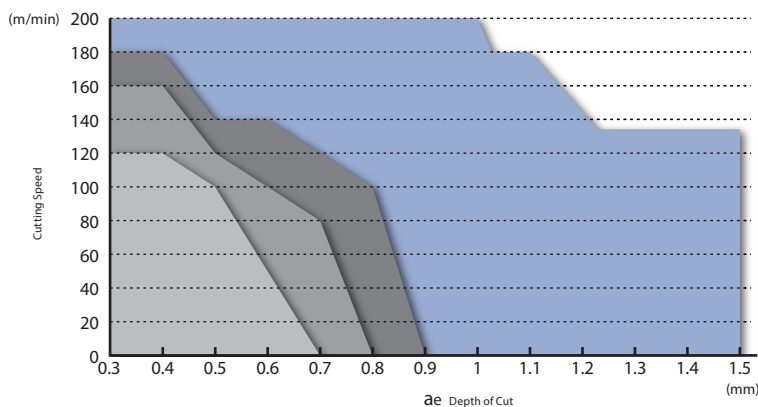


Milling | Solid carbide




DUARISE Coating

Provides excellent lubricity, superior friction-resistance and high oxidation temperature. Multi-layer construction minimizes the thermal cracks that often occurred while using watersoluble oil.

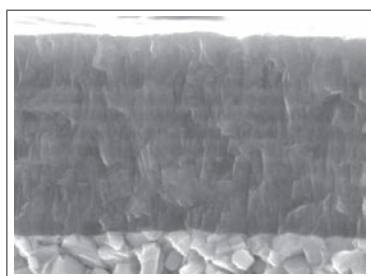

Multi-Layer Construction
 Adhesion Reinforcing Layer

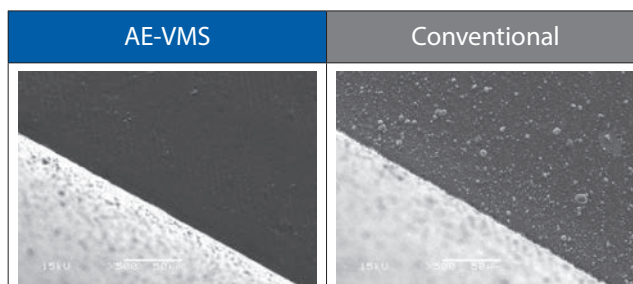

Smoothing surface coating treatment made an excellent quality of surface finishing.

Highly efficient and highly accurate deep side milling at L/D of 5 or more



2,5×D cutting length


Highly efficient deep side milling is possible with large step milling of up to 2×D*

*The recommended depth of cut varies depending on the overhang length.

Long length reduced shank type

Reduced shank types are tools with an outer diameter that is larger than the shank diameter

- Supports deep side milling and pocket milling of mold parts, etc.
- Supports various machining depths by changing the overhang length

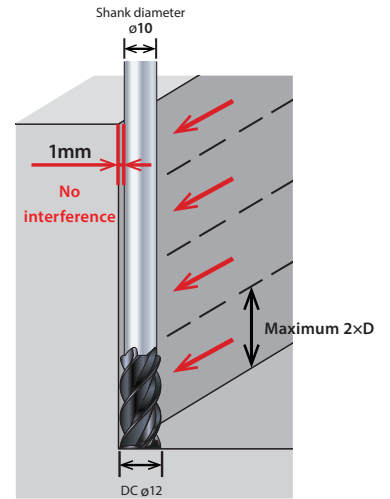

DC > Shank diameter



R shape on the shank side edge

Suppresses streak generation by side step milling

Tool specifications engineered to suppress chattering


The combination of variable lead, unequal spacing teeth and microrelief geometry contributes to stable and high efficiency milling performance

High Efficiency - High Precision

Stable deep side milling at L/D=7


Achieves good milling accuracy with about twice the efficiency versus conventional products

| Tool | AE-VMFE Ø 12 (L.O.C. 30mm) | Conventional Ø 12 (L.O.C. 18mm) | Conventional Extra-long type Ø 12 (L.O.C. 90mm) |
|-----------------|------------------------------------|------------------------------------|--|
| Work Material | SKD61(40HRC) | | |
| Milling Method | Side Step Milling | | Side Milling |
| Cutting Speed | 120m/min (3.183min ⁻¹) | 90m/min (2.387min ⁻¹) | 25m/min (663min ⁻¹) |
| Feed Rate | 1.061mm/min (0,083mm/t) | 800mm/min (0,084mm/t) | 132mm/min (0,05mm/t) |
| Depth of Cut | ap=18mm×4 times ae=0,05mm | ap=12mm×6 times ae=0,05mm | ap=72mm ae=0,05mm |
| Overhang Length | 84mm L/D=7 | | 100mm |
| Processing Time | Approximately 23 Seconds | Approximately 45 Seconds | Approximately 45 Seconds |
| Coolant | Air Blow | | |
| Machine | Vertical Machining Center (BT40) | | |

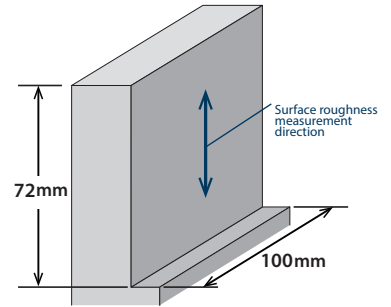


Machining accuracy

After machining

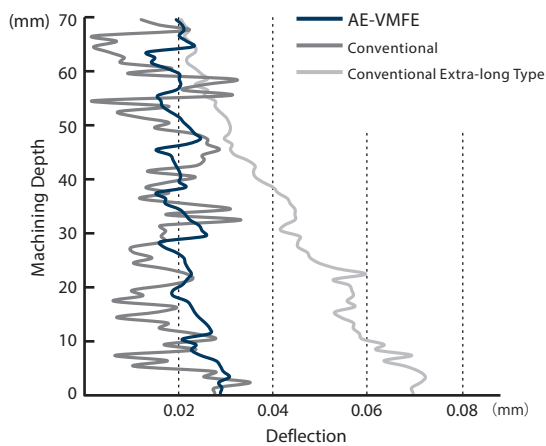

| AE-VMFE | Conventional | Conventional Extra-long Type |
|----------------------------|----------------------------|------------------------------|
| Ra : 0,09µm Rz : 1,03µm | Ra : 1,45µm Rz : 7,49µm | Ra : 1,46µm Rz : 8,07µm |

After zero cut

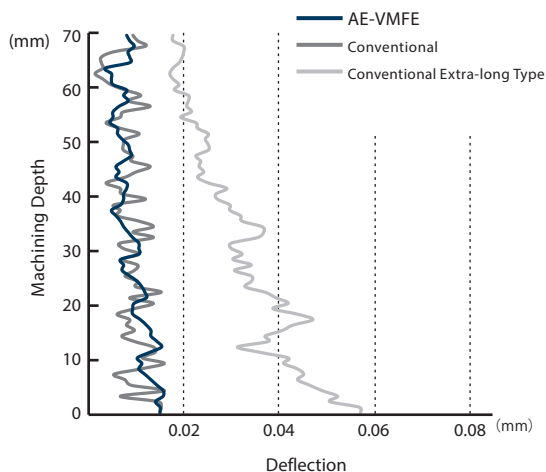

| AE-VMFE | Conventional | Conventional Extra-long Type |
|----------------------------|----------------------------|------------------------------|
| Ra : 0,08µm Rz : 0,96µm | Ra : 1,07µm Rz : 6,37µm | Ra : 1,17µm Rz : 6,99µm |




AE-VMS

Milling | Solid carbide



Type 1

Type 2

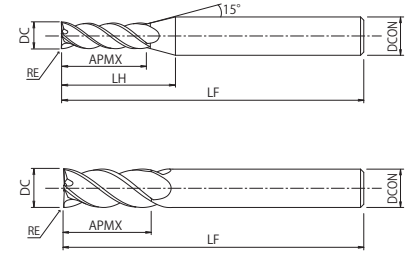

- First choice in quality and performance
- Carbide end mill with Duarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing



| EDP | ZEFP | DC | RE | LF | APMX | DCON | Type | Price |
|---------|------|----|-----|----|------|------|------|-------|
| 8555830 | 4 | 3 | - | 60 | 8 | 6 | 1 | |
| 8556050 | 4 | 3 | 0,2 | 60 | 8 | 6 | 1 | |
| 8556060 | 4 | 3 | 0,5 | 60 | 8 | 6 | 1 | |
| 8555840 | 4 | 4 | - | 60 | 11 | 6 | 1 | |
| 8556070 | 4 | 4 | 0,2 | 60 | 11 | 6 | 1 | |
| 8556080 | 4 | 4 | 0,5 | 60 | 11 | 6 | 1 | |
| 8556090 | 4 | 4 | 1 | 60 | 11 | 6 | 1 | |
| 8555850 | 4 | 5 | - | 60 | 13 | 6 | 1 | |
| 8556100 | 4 | 5 | 0,2 | 60 | 13 | 6 | 1 | |
| 8556110 | 4 | 5 | 0,5 | 60 | 13 | 6 | 1 | |
| 8556120 | 4 | 5 | 1 | 60 | 13 | 6 | 1 | |
| 8555860 | 4 | 6 | - | 60 | 13 | 6 | 2 | |
| 8556130 | 4 | 6 | 0,3 | 60 | 13 | 6 | 2 | |
| 8556140 | 4 | 6 | 0,5 | 60 | 13 | 6 | 2 | |
| 8556150 | 4 | 6 | 1 | 60 | 13 | 6 | 2 | |
| 8555880 | 4 | 8 | - | 70 | 19 | 8 | 2 | |
| 8556160 | 4 | 8 | 0,3 | 70 | 19 | 8 | 2 | |
| 8556170 | 4 | 8 | 0,5 | 70 | 19 | 8 | 2 | |
| 8556180 | 4 | 8 | 1 | 70 | 19 | 8 | 2 | |
| 8556190 | 4 | 8 | 1,5 | 70 | 19 | 8 | 2 | |
| 8556200 | 4 | 8 | 2 | 70 | 19 | 8 | 2 | |
| 8555900 | 4 | 10 | - | 80 | 22 | 10 | 2 | |
| 8556210 | 4 | 10 | 0,3 | 80 | 22 | 10 | 2 | |
| 8556220 | 4 | 10 | 0,5 | 80 | 22 | 10 | 2 | |
| 8556230 | 4 | 10 | 1 | 80 | 22 | 10 | 2 | |
| 8556240 | 4 | 10 | 1,5 | 80 | 22 | 10 | 2 | |
| 8556250 | 4 | 10 | 2 | 80 | 22 | 10 | 2 | |
| 8556260 | 4 | 10 | 3 | 80 | 22 | 10 | 2 | |
| 8555920 | 4 | 12 | - | 90 | 26 | 12 | 2 | |
| 8556270 | 4 | 12 | 0,5 | 90 | 26 | 12 | 2 | |
| 8556280 | 4 | 12 | 1 | 90 | 26 | 12 | 2 | |
| 8556290 | 4 | 12 | 1,5 | 90 | 26 | 12 | 2 | |
| 8556300 | 4 | 12 | 2 | 90 | 26 | 12 | 2 | |
| 8556310 | 4 | 12 | 3 | 90 | 26 | 12 | 2 | |

Milling | Solid carbide




AE-VMS

Milling | Solid carbide



Type 1

Type 2

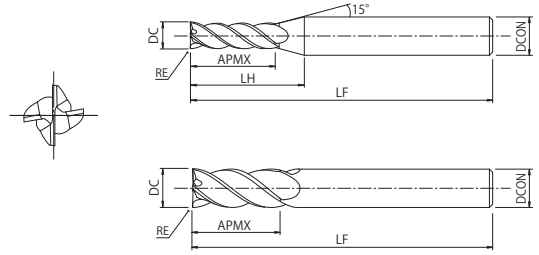

- First choice in quality and performance
- Carbide end mill with Duarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing



Milling | Solid carbide

| EDP | ZEFP | DC | RE | LF | APMX | DCON | Type | Price |
|----------|------|----|-----|-----|------|------|------|-------|
| 8555960 | 4 | 16 | - | 100 | 32 | 16 | 2 | |
| 8557300 | 4 | 16 | 0,5 | 100 | 32 | 16 | 2 | |
| 8557301 | 4 | 16 | 1 | 100 | 32 | 16 | 2 | |
| 48354163 | 4 | 16 | 1,5 | 100 | 32 | 16 | 2 | |
| 8557302 | 4 | 16 | 2 | 100 | 32 | 16 | 2 | |
| 8557303 | 4 | 16 | 2,5 | 100 | 32 | 16 | 2 | |
| 8557304 | 4 | 16 | 3 | 100 | 32 | 16 | 2 | |
| 8557305 | 4 | 16 | 4 | 100 | 32 | 16 | 2 | |
| 8556000 | 4 | 20 | - | 110 | 40 | 20 | 2 | |
| 8557310 | 4 | 20 | 0,5 | 110 | 40 | 20 | 2 | |
| 8557311 | 4 | 20 | 1 | 110 | 40 | 20 | 2 | |
| 8557312 | 4 | 20 | 2 | 110 | 40 | 20 | 2 | |
| 8557313 | 4 | 20 | 2,5 | 110 | 40 | 20 | 2 | |
| 8557314 | 4 | 20 | 3 | 110 | 40 | 20 | 2 | |
| 8557315 | 4 | 20 | 4 | 110 | 40 | 20 | 2 | |
| 8557316 | 4 | 20 | 5 | 110 | 40 | 20 | 2 | |
| 8556010 | 4 | 25 | - | 120 | 50 | 25 | 2 | |
| 8557321 | 4 | 25 | 1 | 120 | 50 | 25 | 2 | |
| 8557322 | 4 | 25 | 2 | 120 | 50 | 25 | 2 | |
| 8557324 | 4 | 25 | 3 | 120 | 50 | 25 | 2 | |
| 8557325 | 4 | 25 | 4 | 120 | 50 | 25 | 2 | |
| 8557326 | 4 | 25 | 5 | 120 | 50 | 25 | 2 | |

AE-VMS RA



Milling | Solid carbide



Type 1



Type 2




- First choice in quality and performance
- Carbide end mill with Duarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing
- With right angle for milling straight corners



| EDP | ZEFP | DC | LF | APMX | LH | DCON | Type | Price |
|---------|------|----|----|------|------|------|------|-------|
| 8555730 | 4 | 3 | 60 | 8 | 15,9 | 6 | 1 | |
| 8555740 | 4 | 4 | 60 | 11 | 17,1 | 6 | 1 | |
| 8555750 | 4 | 5 | 60 | 13 | 17,2 | 6 | 1 | |
| 8555760 | 4 | 6 | 60 | 13 | - | 6 | 2 | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |


Milling | Solid carbide

Right angle type for milling straight corners

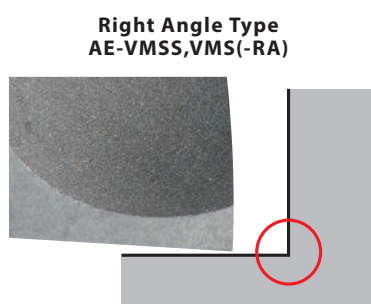

Right Angle Type
AE-VMSS,VMS(-RA)

Straight corners with no uncut residue

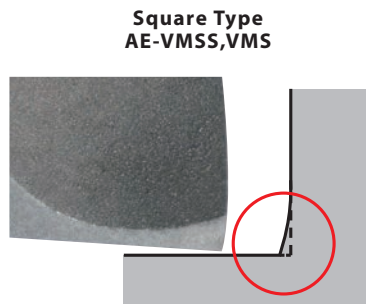

Square Type
AE-VMSS,VMS

Choose the right angle type for milling straight corners!

Choose the square type for high processing efficiency!




AE-VMSS

Milling | Solid carbide



Type 1



Type 2



- First choice in quality and performance
- Carbide end mill with Duarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing
- Anti-vibration stub carbide end-mill, square type, stub length



Milling | Solid carbide



| EDP | ZEFP | DC | LF | APMX | LH | DCON | Type | Price |
|---------|------|-----|----|------|------|------|------|-------|
| 8556410 | 4 | 1 | 40 | 1,5 | 7,9 | 4 | 1 | |
| 8556411 | 4 | 1,1 | 40 | 1,7 | 8 | 4 | 1 | |
| 8556412 | 4 | 1,2 | 40 | 1,8 | 7,9 | 4 | 1 | |
| 8556413 | 4 | 1,3 | 40 | 2 | 7,9 | 4 | 1 | |
| 8556414 | 4 | 1,4 | 40 | 2,1 | 8 | 4 | 1 | |
| 8556415 | 4 | 1,5 | 40 | 2,3 | 7,8 | 4 | 1 | |
| 8556416 | 4 | 1,6 | 40 | 2,4 | 7,9 | 4 | 1 | |
| 8556417 | 4 | 1,7 | 40 | 2,6 | 7,7 | 4 | 1 | |
| 8556418 | 4 | 1,8 | 40 | 2,7 | 7,6 | 4 | 1 | |
| 8556419 | 4 | 1,9 | 40 | 2,9 | 7,7 | 4 | 1 | |
| 8556420 | 4 | 2 | 40 | 3 | 8,2 | 4 | 1 | |
| 8556421 | 4 | 2,1 | 40 | 3,2 | 8,2 | 4 | 1 | |
| 8556422 | 4 | 2,2 | 40 | 3,3 | 8,1 | 4 | 1 | |
| 8556423 | 4 | 2,3 | 40 | 3,5 | 8,1 | 4 | 1 | |
| 8556424 | 4 | 2,4 | 40 | 3,6 | 8 | 4 | 1 | |
| 8556425 | 4 | 2,5 | 40 | 3,8 | 8 | 4 | 1 | |
| 8556426 | 4 | 2,6 | 40 | 3,9 | 8,5 | 4 | 1 | |
| 8556427 | 4 | 2,7 | 40 | 4,1 | 8,5 | 4 | 1 | |
| 8556428 | 4 | 2,8 | 40 | 4,2 | 8,4 | 4 | 1 | |
| 8556429 | 4 | 2,9 | 40 | 4,4 | 8,4 | 4 | 1 | |
| 8556430 | 4 | 3 | 45 | 4,5 | 12,2 | 6 | 1 | |
| 8556431 | 4 | 3,1 | 45 | 4,7 | 12,2 | 6 | 1 | |
| 8556432 | 4 | 3,2 | 45 | 4,8 | 12,2 | 6 | 1 | |
| 8556433 | 4 | 3,3 | 45 | 5 | 12,2 | 6 | 1 | |
| 8556434 | 4 | 3,4 | 45 | 5,1 | 12,1 | 6 | 1 | |
| 8556435 | 4 | 3,5 | 45 | 5,3 | 12,1 | 6 | 1 | |
| 8556436 | 4 | 3,6 | 45 | 5,4 | 12 | 6 | 1 | |
| 8556437 | 4 | 3,7 | 45 | 5,6 | 12 | 6 | 1 | |
| 8556438 | 4 | 3,8 | 45 | 5,7 | 11,9 | 6 | 1 | |
| 8556439 | 4 | 3,9 | 45 | 5,9 | 11,9 | 6 | 1 | |
| 8556440 | 4 | 4 | 45 | 6 | 11,9 | 6 | 1 | |
| 8556441 | 4 | 4,1 | 45 | 6,2 | 12,1 | 6 | 1 | |
| 8556442 | 4 | 4,2 | 45 | 6,3 | 12 | 6 | 1 | |
| 8556443 | 4 | 4,3 | 45 | 6,5 | 12 | 6 | 1 | |
| 8556444 | 4 | 4,4 | 45 | 6,6 | 11,9 | 6 | 1 | |
| 8556445 | 4 | 4,5 | 45 | 6,8 | 11,9 | 6 | 1 | |
| 8556446 | 4 | 4,6 | 45 | 6,9 | 11,8 | 6 | 1 | |
| 8556447 | 4 | 4,7 | 45 | 7,1 | 11,9 | 6 | 1 | |
| 8556448 | 4 | 4,8 | 45 | 7,2 | 11,8 | 6 | 1 | |
| 8556449 | 4 | 4,9 | 45 | 7,4 | 11,8 | 6 | 1 | |
| 8556450 | 4 | 5 | 45 | 7,5 | 11,7 | 6 | 1 | |
| 8556451 | 4 | 5,1 | 45 | 7,7 | 11,7 | 6 | 1 | |
| 8556452 | 4 | 5,2 | 45 | 7,8 | 11,6 | 6 | 1 | |
| 8556453 | 4 | 5,3 | 45 | 8 | 11,6 | 6 | 1 | |
| 8556454 | 4 | 5,4 | 45 | 8,1 | 11,5 | 6 | 1 | |

AE-VMSS


Milling | Solid carbide



Type 1



Type 2

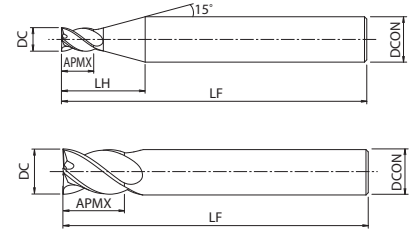

- First choice in quality and performance
- Carbide end mill with Duarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing
- Anti-vibration stub carbide end-mill, square type, stub length



| EDP | ZEFP | DC | LF | APMX | LH | DCON | Type | Price |
|---------|------|------|----|------|------|------|------|-------|
| 8556455 | 4 | 5,5 | 45 | 8,3 | 11,6 | 6 | 1 | |
| 8556456 | 4 | 5,6 | 45 | 8,4 | 11,5 | 6 | 1 | |
| 8556457 | 4 | 5,7 | 45 | 8,6 | 11,5 | 6 | 1 | |
| 8556458 | 4 | 5,8 | 45 | 8,7 | 11,4 | 6 | 1 | |
| 8556459 | 4 | 5,9 | 45 | 8,9 | 11,4 | 6 | 1 | |
| 8556460 | 4 | 6 | 45 | 9 | - | 6 | 2 | |
| 8556465 | 4 | 6,5 | 60 | 9,8 | 14,9 | 8 | 1 | |
| 8556470 | 4 | 7 | 60 | 10,5 | 14,7 | 8 | 1 | |
| 8556475 | 4 | 7,5 | 60 | 11,3 | 14,6 | 8 | 1 | |
| 8556480 | 4 | 8 | 60 | 12 | - | 8 | 2 | |
| 8556485 | 4 | 8,5 | 70 | 12,8 | 17,9 | 10 | 1 | |
| 8556490 | 4 | 9 | 70 | 13,5 | 17,7 | 10 | 1 | |
| 8556495 | 4 | 9,5 | 70 | 14,3 | 17,6 | 10 | 1 | |
| 8556500 | 4 | 10 | 70 | 15 | - | 10 | 2 | |
| 8556505 | 4 | 10,5 | 75 | 15,8 | 20,9 | 12 | 1 | |
| 8556510 | 4 | 11 | 75 | 16,5 | 20,7 | 12 | 1 | |
| 8556515 | 4 | 11,5 | 75 | 17,3 | 20,6 | 12 | 1 | |
| 8556520 | 4 | 12 | 75 | 18 | - | 12 | 2 | |



AE-VMSS RA


Milling | Solid carbide



Type 1



Type 2

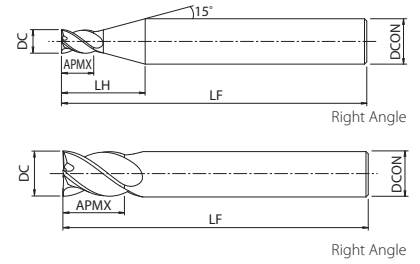


- First choice in quality and performance
- Carbide end mill with Duarise coating
- Wide variety in applications and work materials
- 4 flutes, variable helix and unequal spacing
- Anti-vibration stub carbide end-mill, stub length
- With right angle for milling straight corners




Milling | Solid carbide

| EDP | ZEFP | DC | LF | APMX | LH | DCON | Type | Price |
|---------|------|-----|----|------|------|------|------|-------|
| 8556550 | 4 | 1 | 40 | 1,5 | 7,9 | 4 | 1 | |
| 8556555 | 4 | 1,5 | 40 | 2,3 | 7,8 | 4 | 1 | |
| 8556560 | 4 | 2 | 40 | 3 | 8,2 | 4 | 1 | |
| 8556565 | 4 | 2,5 | 40 | 3,8 | 8 | 4 | 1 | |
| 8556570 | 4 | 3 | 45 | 4,5 | 12,2 | 6 | 1 | |
| 8556575 | 4 | 3,5 | 45 | 5,3 | 12,1 | 6 | 1 | |
| 8556580 | 4 | 4 | 45 | 6 | 11,9 | 6 | 1 | |
| 8556585 | 4 | 4,5 | 45 | 6,8 | 11,9 | 6 | 1 | |
| 8556590 | 4 | 5 | 45 | 7,5 | 11,7 | 6 | 1 | |
| 8556595 | 4 | 5,5 | 45 | 8,3 | 11,6 | 6 | 1 | |
| 8556600 | 4 | 6 | 45 | 9 | — | 6 | 2 | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

Right angle type for milling straight corners

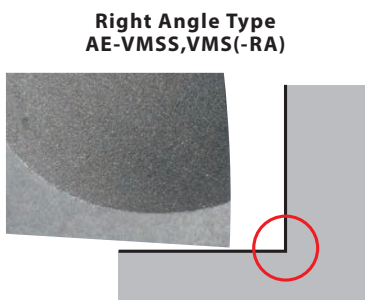

Straight corners with no uncut residue

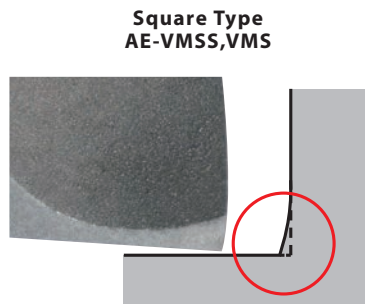

Choose the right angle type for milling straight corners!

Choose the square type for high processing efficiency!

AE-VML


Milling | Solid carbide



Type 1




4-Flute



Type 2



5-Flute

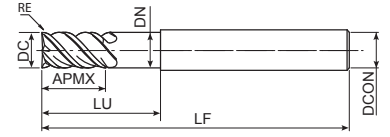

- First choice in quality and performance
- 4-5 flutes, square type, also with radius
- Anti-vibration long carbide end mill
- For side milling, length of cut up to 4xD



Milling | Solid carbide

| EDP | ZEFP | DC | RE | LF | APMX | LU | DN | DCON | ULDR | Type | Price |
|----------|------|----|-----|-----|------|-----|------|------|------|------|-------|
| 8556320 | 4 | 6 | - | 70 | 19 | - | - | 6 | 3 | 1 | |
| 8556336 | 4 | 6 | 0,3 | 70 | 19 | - | - | 6 | 3 | 1 | |
| 8556337 | 4 | 6 | 0,5 | 70 | 19 | - | - | 6 | 3 | 1 | |
| 8556338 | 4 | 6 | 1 | 70 | 19 | - | - | 6 | 3 | 1 | |
| 8556322 | 4 | 8 | - | 80 | 25 | - | - | 8 | 3 | 1 | |
| 8556339 | 4 | 8 | 0,3 | 80 | 25 | - | - | 8 | 3 | 1 | |
| 8556340 | 4 | 8 | 0,5 | 80 | 25 | - | - | 8 | 3 | 1 | |
| 8556341 | 4 | 8 | 1 | 80 | 25 | - | - | 8 | 3 | 1 | |
| 8556342 | 4 | 8 | 1,5 | 80 | 25 | - | - | 8 | 3 | 1 | |
| 8556343 | 4 | 8 | 2 | 80 | 25 | - | - | 8 | 3 | 1 | |
| 8556324 | 4 | 10 | - | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556344 | 4 | 10 | 0,3 | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556345 | 4 | 10 | 0,5 | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556346 | 4 | 10 | 1 | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556347 | 4 | 10 | 1,5 | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556348 | 4 | 10 | 2 | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556349 | 4 | 10 | 3 | 90 | 31 | - | - | 10 | 3 | 1 | |
| 8556326 | 4 | 12 | - | 100 | 38 | - | - | 12 | 3 | 1 | |
| 8556350 | 4 | 12 | 0,5 | 100 | 38 | - | - | 12 | 3 | 1 | |
| 8556351 | 4 | 12 | 1 | 100 | 38 | - | - | 12 | 3 | 1 | |
| 8556352 | 4 | 12 | 1,5 | 100 | 38 | - | - | 12 | 3 | 1 | |
| 8556353 | 4 | 12 | 2 | 100 | 38 | - | - | 12 | 3 | 1 | |
| 8556354 | 4 | 12 | 3 | 100 | 38 | - | - | 12 | 3 | 1 | |
| 8556374 | 5 | 16 | - | 125 | 50 | - | - | 16 | 3 | 1 | |
| 8556376 | 5 | 20 | - | 135 | 62 | - | - | 20 | 3 | 1 | |
| 8556328 | 4 | 6 | - | 70 | 24 | - | - | 6 | 4 | 1 | |
| 8556355 | 4 | 6 | 0,3 | 70 | 24 | - | - | 6 | 4 | 1 | |
| 8556356 | 4 | 6 | 0,5 | 70 | 24 | - | - | 6 | 4 | 1 | |
| 8556357 | 4 | 6 | 1 | 70 | 24 | - | - | 6 | 4 | 1 | |
| 8556330 | 4 | 8 | - | 90 | 32 | - | - | 8 | 4 | 1 | |
| 8556358 | 4 | 8 | 0,3 | 90 | 32 | - | - | 8 | 4 | 1 | |
| 8556359 | 4 | 8 | 0,5 | 90 | 32 | - | - | 8 | 4 | 1 | |
| 8556360 | 4 | 8 | 1 | 90 | 32 | - | - | 8 | 4 | 1 | |
| 8556361 | 4 | 8 | 1,5 | 90 | 32 | - | - | 8 | 4 | 1 | |
| 8556362 | 4 | 8 | 2 | 90 | 32 | - | - | 8 | 4 | 1 | |
| 8556332 | 4 | 10 | - | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556363 | 4 | 10 | 0,3 | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556364 | 4 | 10 | 0,5 | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556365 | 4 | 10 | 1 | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556366 | 4 | 10 | 1,5 | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556367 | 4 | 10 | 2 | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556368 | 4 | 10 | 3 | 100 | 40 | - | - | 10 | 4 | 1 | |
| 8556334 | 4 | 12 | - | 110 | 48 | - | - | 12 | 4 | 1 | |
| 8556369 | 4 | 12 | 0,5 | 110 | 48 | - | - | 12 | 4 | 1 | |
| 8556370 | 4 | 12 | 1 | 110 | 48 | - | - | 12 | 4 | 1 | |
| 8556371 | 4 | 12 | 1,5 | 110 | 48 | - | - | 12 | 4 | 1 | |
| 8556372 | 4 | 12 | 2 | 110 | 48 | - | - | 12 | 4 | 1 | |
| 8556373 | 4 | 12 | 3 | 110 | 48 | - | - | 12 | 4 | 1 | |
| 8556378 | 5 | 16 | - | 140 | 64 | - | - | 16 | 4 | 1 | |
| 8556380 | 5 | 20 | - | 155 | 80 | - | - | 20 | 4 | 1 | |
| 48330162 | 4 | 16 | 1 | 150 | 64 | 100 | 15,5 | 16 | 4 | 2 | |
| 48330202 | 4 | 20 | 1 | 150 | 80 | 100 | 19,4 | 20 | 4 | 2 | |

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VTSS

Slot Milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | |
|---------------|--|------------|---|------------|---|------------|--|------------|---|------------|-----------------------------|------------|
| | 100 | 70 | 60 | 60 | 50 | 50 | | | | | | |
| ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) |
| 3 | 10.600 | 650 | 7.400 | 480 | 6.400 | 350 | 6.400 | 330 | 5.300 | 300 | 5.300 | 280 |
| 4 | 8.000 | 670 | 5.600 | 500 | 4.800 | 350 | 4.800 | 340 | 4.000 | 320 | 4.000 | 310 |
| 5 | 6.400 | 710 | 4.500 | 560 | 3.800 | 420 | 3.800 | 390 | 3.200 | 340 | 3.200 | 330 |
| 6 | 5.300 | 740 | 3.700 | 620 | 3.200 | 460 | 3.200 | 260 | 2.700 | 330 | 2.700 | 320 |
| 8 | 4.000 | 630 | 2.800 | 500 | 2.400 | 440 | 2.400 | 260 | 2.000 | 310 | 2.000 | 300 |
| 10 | 3.200 | 580 | 2.200 | 490 | 1.900 | 380 | 1.900 | 240 | 1.600 | 290 | 1.600 | 280 |
| 12 | 2.700 | 560 | 1.900 | 460 | 1.600 | 380 | 1.600 | 230 | 1.300 | 290 | 1.300 | 280 |
| Depth of cut | ap 0,5D | | | | | | ap 0,25D | | | | | |

Side Milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | |
|---------------|--|------------|---|------------|---|------------|--|------------|---|------------|-----------------------------|------------|
| | 100 | 90 | 80 | 70 | 70 | 60 | | | | | | |
| ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) |
| 3 | 10.600 | 960 | 9.600 | 610 | 8.500 | 460 | 7.400 | 310 | 7.400 | 330 | 6.400 | 310 |
| 4 | 8.000 | 1.060 | 7.200 | 650 | 6.400 | 480 | 5.600 | 350 | 5.600 | 360 | 4.800 | 340 |
| 5 | 6.400 | 1.150 | 5.700 | 690 | 5.100 | 540 | 4.500 | 370 | 4.500 | 370 | 3.800 | 340 |
| 6 | 5.300 | 1.190 | 4.800 | 870 | 4.200 | 630 | 3.700 | 420 | 3.700 | 380 | 3.200 | 360 |
| 8 | 4.000 | 1.020 | 3.600 | 870 | 3.200 | 620 | 2.800 | 400 | 2.800 | 300 | 2.400 | 280 |
| 10 | 3.200 | 960 | 2.900 | 780 | 2.500 | 530 | 2.200 | 380 | 2.200 | 280 | 1.900 | 270 |
| 12 | 2.700 | 810 | 2.400 | 720 | 2.100 | 440 | 1.900 | 360 | 1.900 | 280 | 1.600 | 250 |
| Depth of cut | ap 1D | | | | | | ae 0,2D | | | | | |

Plunging

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | |
|---------------|--|------------|---|------------|---|------------|--|------------|---|------------|-----------------------------|------------|
| | 100 | 70 | 60 | 60 | 50 | 50 | | | | | | |
| ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) |
| 3 | 10.600 | 250 | 7.400 | 115 | 6.400 | 110 | 6.400 | 110 | 5.300 | 60 | 5.300 | 60 |
| 4 | 8.000 | 250 | 5.600 | 115 | 4.800 | 110 | 4.800 | 110 | 4.000 | 60 | 4.000 | 60 |
| 5 | 6.400 | 285 | 4.500 | 120 | 3.800 | 110 | 3.800 | 110 | 3.200 | 65 | 3.200 | 65 |
| 6 | 5.300 | 320 | 3.700 | 120 | 3.200 | 110 | 3.200 | 110 | 2.700 | 70 | 2.700 | 70 |
| 8 | 4.000 | 300 | 2.800 | 110 | 2.400 | 100 | 2.400 | 100 | 2.000 | 65 | 2.000 | 65 |
| 10 | 3.200 | 290 | 2.200 | 105 | 1.900 | 95 | 1.900 | 95 | 1.600 | 60 | 1.600 | 60 |
| 12 | 2.700 | 275 | 1.900 | 100 | 1.600 | 90 | 1.600 | 90 | 1.300 | 55 | 1.300 | 55 |
| Depth of cut | ap ≤0,5D | | | | | | | | | | | |

1. Use a rigid and precise machine and holder.
2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
5. Please use water-soluble coolant when machining stainless steel, precipitation stainless steel, titanium alloy.
6. Reduce speed and feed as well as depth of cut when high precision is required.



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMS

Square Type / Right Angle Type *

Slot Milling

* For right angle type, please use 70% of the speed and feed shown in the table below as reference.

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) |
| 3 | 10.600 | 930 | 9.600 | 690 | 8.500 | 510 | 7.400 | 470 | 8.540 | 430 | 7.430 | 410 | 3.180 | 160 |
| 4 | 8.000 | 960 | 7.200 | 720 | 6.400 | 510 | 5.600 | 490 | 6.410 | 460 | 5.570 | 440 | 2.390 | 170 |
| 5 | 6.400 | 1.020 | 5.700 | 800 | 5.100 | 610 | 4.500 | 560 | 5.120 | 490 | 4.460 | 470 | 1.910 | 180 |
| 6 | 5.300 | 1.060 | 4.800 | 900 | 4.200 | 670 | 3.700 | 370 | 4.270 | 480 | 3.710 | 460 | 1.590 | 180 |
| 8 | 4.000 | 910 | 3.600 | 720 | 3.200 | 640 | 2.800 | 370 | 2.750 | 450 | 2.390 | 430 | 1.190 | 200 |
| 10 | 3.200 | 840 | 2.900 | 700 | 2.500 | 550 | 2.200 | 350 | 2.200 | 420 | 1.910 | 400 | 950 | 180 |
| 12 | 2.700 | 810 | 2.400 | 670 | 2.100 | 550 | 1.900 | 330 | 1.830 | 420 | 1.590 | 400 | 800 | 180 |
| 16 | 2.000 | 600 | 1.800 | 500 | 1.600 | 420 | 1.200 | 310 | 1.140 | 260 | 990 | 250 | 500 | 110 |
| 20 | 1.600 | 480 | 1.400 | 390 | 1.300 | 340 | 900 | 250 | 920 | 270 | 800 | 260 | 400 | 120 |
| 25 | 1.300 | 390 | 1.100 | 310 | 1.000 | 260 | 600 | 170 | 730 | 250 | 640 | 240 | 250 | 90 |
| Depth of cut | ap 1D | | | | Dc ap Dc≤6 0,5D 6<Dc 1D | | | | ap 0,25D | | | | | |

Side Milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) |
| 3 | 13.800 | 1.660 | 12.700 | 1.070 | 10.600 | 760 | 8.000 | 480 | 9.760 | 510 | 8.490 | 480 | 4.240 | 220 |
| 4 | 10.400 | 1.830 | 9.600 | 1.150 | 8.000 | 800 | 6.000 | 530 | 7.320 | 550 | 6.370 | 530 | 3.180 | 240 |
| 5 | 8.300 | 1.990 | 7.600 | 1.220 | 6.400 | 900 | 4.800 | 560 | 5.860 | 560 | 5.090 | 540 | 2.550 | 250 |
| 6 | 6.900 | 2.070 | 6.400 | 1.540 | 5.300 | 1.060 | 4.200 | 640 | 4.880 | 580 | 4.240 | 550 | 2.120 | 250 |
| 8 | 5.200 | 1.770 | 4.800 | 1.540 | 4.000 | 1.040 | 3.200 | 610 | 3.200 | 450 | 2.790 | 430 | 1.590 | 230 |
| 10 | 4.100 | 1.640 | 3.800 | 1.370 | 3.200 | 900 | 2.500 | 580 | 2.560 | 430 | 2.230 | 410 | 1.270 | 220 |
| 12 | 3.500 | 1.400 | 3.200 | 1.280 | 2.700 | 760 | 2.100 | 530 | 2.140 | 420 | 1.860 | 400 | 1.060 | 210 |
| 16 | 2.600 | 1.250 | 2.400 | 1.060 | 2.000 | 640 | 1.400 | 450 | 1.370 | 410 | 1.190 | 400 | 700 | 210 |
| 20 | 2.100 | 1.010 | 1.900 | 840 | 1.600 | 510 | 1.100 | 370 | 1.100 | 390 | 950 | 380 | 560 | 200 |
| 25 | 1.700 | 820 | 1.500 | 660 | 1.300 | 420 | 900 | 310 | 880 | 510 | 760 | 490 | 320 | 190 |
| Depth of cut | | | | | ap ae 1,5D 0,2D | | | | | | | | | |

1. The above milling condition is a guideline for the overhang length is 3xD.
2. Use a rigid and precise machine and holder.
3. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
4. Please use a suitable fluid with high smoke retardant properties.
5. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
6. Please use water-soluble oil when machining stainless steel.
7. Reduce speed and feed as well as depth of cut when high precision is required.
8. Adjust the speed and feed accordingly when the overhang length is longer than specified.

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMS

Radius Type

Slot Milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|--|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | |
| 3 | 10.600 | 790 | 9.600 | 590 | 8.500 | 410 | 7.400 | 380 | 8.540 | 430 | 7.430 | 410 | 3.180 | 160 | | |
| 4 | 8.000 | 820 | 7.200 | 610 | 6.400 | 410 | 5.600 | 390 | 6.410 | 460 | 5.570 | 440 | 2.390 | 170 | | |
| 5 | 6.400 | 870 | 5.700 | 680 | 5.100 | 490 | 4.500 | 450 | 5.120 | 490 | 4.460 | 470 | 1.910 | 180 | | |
| 6 | 5.300 | 1.010 | 4.800 | 860 | 4.200 | 600 | 3.700 | 330 | 4.270 | 480 | 3.710 | 460 | 1.590 | 180 | | |
| 8 | 4.000 | 870 | 3.600 | 680 | 3.200 | 580 | 2.800 | 330 | 2.750 | 450 | 2.390 | 430 | 1.190 | 200 | | |
| 10 | 3.200 | 800 | 2.900 | 660 | 2.500 | 500 | 2.200 | 320 | 2.200 | 420 | 1.910 | 400 | 950 | 180 | | |
| 12 | 2.700 | 770 | 2.400 | 640 | 2.100 | 490 | 1.900 | 300 | 1.830 | 420 | 1.590 | 400 | 800 | 180 | | |
| 16 | 2.000 | 570 | 1.800 | 480 | 1.600 | 370 | 1.200 | 290 | 1.140 | 260 | 990 | 250 | 500 | 110 | | |
| 20 | 1.600 | 460 | 1.400 | 370 | 1.300 | 300 | 900 | 230 | 920 | 270 | 800 | 260 | 400 | 120 | | |
| 25 | 1.300 | 370 | 1.100 | 290 | 1.000 | 230 | 600 | 150 | 730 | 250 | 640 | 240 | 250 | 90 | | |
| Depth of cut | ap 1D | | | | | | Dc Dc≤6 6<Dc | | ap 0,5D 1D | | ap 0,25D | | | | | |

Side Milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|--|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | |
| 3 | 13.800 | 1.660 | 12.700 | 1.070 | 10.600 | 760 | 8.000 | 480 | 9.760 | 510 | 8.490 | 480 | 4.240 | 220 | | |
| 4 | 10.400 | 1.830 | 9.600 | 1.150 | 8.000 | 800 | 6.000 | 530 | 7.320 | 550 | 6.370 | 530 | 3.180 | 240 | | |
| 5 | 8.300 | 1.990 | 7.600 | 1.220 | 6.400 | 900 | 4.800 | 560 | 5.860 | 560 | 5.090 | 540 | 2.550 | 250 | | |
| 6 | 6.900 | 2.070 | 6.400 | 1.540 | 5.300 | 1.060 | 4.200 | 640 | 4.880 | 580 | 4.240 | 550 | 2.120 | 250 | | |
| 8 | 5.200 | 1.770 | 4.800 | 1.540 | 4.000 | 1.040 | 3.200 | 610 | 3.200 | 450 | 2.790 | 430 | 1.590 | 230 | | |
| 10 | 4.100 | 1.640 | 3.800 | 1.370 | 3.200 | 900 | 2.500 | 580 | 2.560 | 430 | 2.230 | 410 | 1.270 | 220 | | |
| 12 | 3.500 | 1.400 | 3.200 | 1.280 | 2.700 | 760 | 2.100 | 530 | 2.140 | 420 | 1.860 | 400 | 1.060 | 210 | | |
| 16 | 2.600 | 1.250 | 2.400 | 1.060 | 2.000 | 640 | 1.400 | 450 | 1.370 | 410 | 1.190 | 400 | 700 | 210 | | |
| 20 | 2.100 | 1.010 | 1.900 | 840 | 1.600 | 510 | 1.100 | 370 | 1.100 | 390 | 950 | 380 | 560 | 200 | | |
| 25 | 1.700 | 820 | 1.500 | 660 | 1.300 | 420 | 900 | 310 | 880 | 510 | 760 | 490 | 320 | 190 | | |
| Depth of cut | ap 1,5D | | | | | | ae 0,2D | | | | | | | | | |

- The above milling condition is a guideline for the overhang length is 3xD.
- Use a rigid and precise machine and holder.
- The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
- Please use a suitable fluid with high smoke retardant properties.
- During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
- Please use water-soluble oil when machining stainless steel.
- Reduce speed and feed as well as depth of cut when high precision is required.
- Adjust the speed and feed accordingly when the overhang length is longer than specified.

Fix rate cutting condition

DC ≥ ∅6

| Work Material | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | |
|---------------|--|-----|---|------------|---|------------|--|------------|---|------------|-----------------------------|------------|-------------------------------|------------|-----|
| | ∅ | L/D | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | |
| Side Milling | 4 | | 80% | | 70% | | 70% | | 60% | | 60% | | 50% | | 50% |
| | 5 | | 70% | | 60% | | 60% | | 50% | | 50% | | 50% | | 50% |
| Slotting | 4 | | 90% | | 90% | | 80% | | 70% | | 70% | | 60% | | 60% |
| | 5 | | 80% | | 80% | | 70% | | 70% | | 70% | | 60% | | 60% |

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMSS

Square Type / Right Angle Type*

Slot milling

* For right angle type, please use 70% of the speed and feed shown in the table below as reference.

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | |
|----------------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) |
| 100 (80-120) (m/min) | | | | | | | | | | | | | | | |
| 90 (70-110) (m/min) | | | | | | | | | | | | | | | |
| 80 (60-100) (m/min) | | | | | | | | | | | | | | | |
| 70 (50-80) (m/min) | | | | | | | | | | | | | | | |
| 60 (50-70) (m/min) | | | | | | | | | | | | | | | |
| 25 (20-30) (m/min) | | | | | | | | | | | | | | | |
| Depth of cut | ap 1D | | | | | | Dc ap Dc≤6 0,5D Dc>6 1D | | ap 0,25D | | | | | | |

Side milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | |
|-----------------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) |
| 130 (100-150) (m/min) | | | | | | | | | | | | | | | |
| 120 (100-150) (m/min) | | | | | | | | | | | | | | | |
| 100 (80-120) (m/min) | | | | | | | | | | | | | | | |
| 80 (60-100) (m/min) | | | | | | | | | | | | | | | |
| 80 (70-90) (m/min) | | | | | | | | | | | | | | | |
| 70 (60-80) (m/min) | | | | | | | | | | | | | | | |
| 30 (25-40) (m/min) | | | | | | | | | | | | | | | |
| Depth of cut | ap 1,5D | | | | | | ae 0,2D | | | | | | | | |

- The above milling condition is a guideline for the overhang length is 3xD.
- Use a rigid and precise machine and holder.
- The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
- Please use a suitable fluid with high smoke retardant properties.
- During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
- Please use water-soluble oil when machining stainless steel.
- Reduce speed and feed as well as depth of cut when high precision is required.
- Adjust the speed and feed accordingly when the overhang length is longer than specified.

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMSS

Long Neck Type

Side milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | | | | |
|----------------------|---|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|----|------|------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 105 (80-120) (m/min) | 95 (70-110) (m/min) | | 70 (50-90) (m/min) | | 60 (40-80) (m/min) | | 60 (50-70) (m/min) | | 50 (40-60) (m/min) | | 30 (20-35) (m/min) | | | | | | | |
| 6 | 5.520 | 1.660 | 5.120 | 1.230 | 3.710 | 740 | 2.940 | 450 | 3.420 | 410 | 2.970 | 390 | 1.480 | 180 | | | | |
| 8 | 4.160 | 1.420 | 3.840 | 1.230 | 2.800 | 730 | 2.240 | 430 | 2.240 | 320 | 1.950 | 300 | 1.110 | 160 | | | | |
| 10 | 3.280 | 1.310 | 3.040 | 1.100 | 2.240 | 630 | 1.750 | 410 | 1.790 | 300 | 1.560 | 290 | 890 | 150 | | | | |
| 12 | 2.800 | 1.120 | 2.560 | 1.020 | 1.890 | 530 | 1.470 | 370 | 1.500 | 290 | 1.300 | 280 | 740 | 150 | | | | |
| Depth of cut | <table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>1,5D</td> <td>0,2D</td> </tr> </table> | | | | | | | | | | | | | | ap | ae | 1,5D | 0,2D |
| ap | ae | | | | | | | | | | | | | | | | | |
| 1,5D | 0,2D | | | | | | | | | | | | | | | | | |

1. Use a rigid and precise machine and holder.
2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
3. Please use a suitable fluid with high smoke retardant properties.
4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
5. Please use water-soluble oil when machining stainless steel.
6. Reduce speed and feed as well as depth of cut when high precision is required.

Fix rate cutting condition

DC ≥ ∅6

| ∅ | L/D | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | |
|--------------|-----|--|------------|---|------------|---|------------|--|------------|---|------------|-----------------------------|------------|-------------------------------|------------|
| | | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) |
| Side Milling | 4 | 80% | | 70% | | 70% | | 60% | | 60% | | 50% | | 50% | |
| | 5 | 70% | | 60% | | 60% | | 50% | | 50% | | 50% | | 50% | |
| Slotting | 4 | 90% | | 90% | | 80% | | 70% | | 70% | | 60% | | 60% | |
| | 5 | 80% | | 80% | | 70% | | 70% | | 70% | | 60% | | 60% | |



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VML

Long Type (Applies to square / radius / chipbreaker type)

ae=0.05D • Standard side milling 3D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|--|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | |
| 160 (140-180) | 150 (130-170) | 140 (120-160) | 125 (100-140) | 115 (90-130) | 105 (80-120) | 85 (70-90) | | | | | | | | | | |
| 6 | 8.500 | 2.480 | 8.000 | 2.180 | 7.400 | 2.010 | 6.600 | 1.660 | 6.100 | 1.530 | 5.600 | 1.400 | 4.500 | 1.080 | | |
| 8 | 6.400 | 1.870 | 6.000 | 1.630 | 5.600 | 1.520 | 5.000 | 1.260 | 4.600 | 1.160 | 4.200 | 1.050 | 3.400 | 820 | | |
| 10 | 5.100 | 1.730 | 4.800 | 1.440 | 4.500 | 1.350 | 4.000 | 1.120 | 3.700 | 1.040 | 3.300 | 920 | 2.700 | 720 | | |
| 12 | 4.200 | 1.430 | 4.000 | 1.200 | 3.700 | 1.110 | 3.300 | 920 | 3.000 | 840 | 2.800 | 780 | 2.200 | 590 | | |
| 16 | 3.180 | 1.590 | 2.990 | 1.350 | 2.790 | 1.260 | 2.490 | 1.000 | 2.290 | 920 | 2.090 | 840 | 1.690 | 630 | | |
| 20 | 2.550 | 1.280 | 2.390 | 1.080 | 2.230 | 1.000 | 1.990 | 800 | 1.830 | 730 | 1.670 | 670 | 1.350 | 510 | | |
| Depth of cut | ap | | ae | | 3D | | 0,05D | | | | | | | | | |

1. Use a rigid and precise machine and holder.
 2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine.
 3. Please use a suitable fluid with high smoke retardant properties.
 4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing.
 5. Please use water-soluble coolant when machining stainless steel.

ae=0.1D • High efficiency side milling 3D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | | | | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|------------|--|--|--|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 220 (200-240) | 170 (150-190) | 135 (110-150) | 130 (110-150) | 120 (100-140) | 110 (90-130) | | | | | | | | | | | |
| 6 | 11.700 | 3.180 | 9.000 | 2.270 | 7.200 | 1.810 | 6.900 | 1.600 | 6.400 | 1.480 | 5.800 | 1.340 | | | | |
| 8 | 8.800 | 2.390 | 6.800 | 1.710 | 5.400 | 1.360 | 5.200 | 1.210 | 4.800 | 1.120 | 4.400 | 1.020 | | | | |
| 10 | 7.000 | 2.240 | 5.400 | 1.510 | 4.300 | 1.200 | 4.100 | 1.070 | 3.800 | 990 | 3.500 | 910 | | | | |
| 12 | 5.800 | 1.860 | 4.500 | 1.260 | 3.600 | 1.010 | 3.500 | 910 | 3.200 | 830 | 2.900 | 750 | | | | |
| 16 | 4.380 | 1.970 | 3.380 | 1.350 | 2.690 | 1.080 | 2.590 | 910 | 2.390 | 840 | 2.190 | 770 | | | | |
| 20 | 3.500 | 1.580 | 2.710 | 1.080 | 2.150 | 860 | 2.070 | 720 | 1.910 | 670 | 1.750 | 610 | | | | |
| Depth of cut | ap | | ae | | 3D | | 0,1D | | | | | | | | | |

ae=0.15D • High efficiency side milling 3D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | | | | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|------------|--|--|--|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 140 (120-160) | 100 (80-120) | 90 (70-110) | 85 (60-100) | 75 (50-90) | 65 (40-80) | | | | | | | | | | | |
| 6 | 7.400 | 1.860 | 5.600 | 1.300 | 4.800 | 1.110 | 4.500 | 950 | 4.000 | 840 | 3.400 | 720 | | | | |
| 8 | 5.600 | 1.410 | 4.200 | 970 | 3.600 | 840 | 3.400 | 720 | 3.000 | 640 | 2.600 | 550 | | | | |
| 10 | 4.500 | 1.350 | 3.300 | 860 | 2.900 | 750 | 2.700 | 650 | 2.400 | 580 | 2.100 | 510 | | | | |
| 12 | 3.700 | 1.110 | 2.800 | 730 | 2.400 | 620 | 2.300 | 550 | 2.000 | 480 | 1.700 | 410 | | | | |
| 16 | 2.790 | 1.120 | 1.990 | 700 | 1.790 | 630 | 1.690 | 570 | 1.490 | 510 | 1.290 | 420 | | | | |
| 20 | 2.230 | 890 | 1.590 | 560 | 1.430 | 500 | 1.350 | 460 | 1.190 | 400 | 1.040 | 340 | | | | |
| Depth of cut | ap | | ae | | 3D | | 0,15D | | | | | | | | | |

ae≤0.2D • High efficiency side milling 3D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | | | | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|------------|--|--|--|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 100 (80-120) | 80 (60-100) | 70 (50-90) | 65 (40-80) | 55 (30-70) | 45 (20-60) | | | | | | | | | | | |
| 6 | 5.300 | 1.230 | 4.200 | 890 | 3.700 | 780 | 3.500 | 670 | 2.900 | 560 | 2.400 | 460 | | | | |
| 8 | 4.000 | 930 | 3.200 | 680 | 2.800 | 590 | 2.600 | 500 | 2.200 | 420 | 1.800 | 350 | | | | |
| 10 | 3.200 | 900 | 2.500 | 600 | 2.200 | 530 | 2.100 | 460 | 1.800 | 390 | 1.400 | 310 | | | | |
| 12 | 2.700 | 760 | 2.100 | 500 | 1.900 | 460 | 1.700 | 370 | 1.500 | 330 | 1.200 | 260 | | | | |
| 16 | 1.990 | 800 | 1.590 | 560 | 1.390 | 490 | 1.290 | 420 | 1.090 | 350 | 900 | 270 | | | | |
| 20 | 1.590 | 640 | 1.270 | 440 | 1.110 | 390 | 1.040 | 340 | 880 | 290 | 720 | 220 | | | | |
| Depth of cut | ap | | ae | | 3D | | 0,20D | | | | | | | | | |

Milling | Solid carbide

CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VML

Long type (Applies to square / radius / chipbreaker type)

ae=0.05D • Standard side milling 4D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | | | | | |
|--|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|------------|----|----|-------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 6 | 7.400 | 2.010 | 6.900 | 1.740 | 6.400 | 1.610 | 6.100 | 1.420 | 5.600 | 1.300 | 5.000 | 1.160 | 4.000 | 880 | | | | |
| 8 | 5.600 | 1.520 | 5.200 | 1.310 | 4.800 | 1.210 | 4.600 | 1.070 | 4.200 | 980 | 3.800 | 880 | 3.000 | 660 | | | | |
| 10 | 4.500 | 1.440 | 4.100 | 1.230 | 3.800 | 1.140 | 3.700 | 960 | 3.300 | 860 | 3.000 | 780 | 2.400 | 590 | | | | |
| 12 | 3.700 | 1.180 | 3.500 | 1.050 | 3.200 | 960 | 3.100 | 810 | 2.800 | 730 | 2.500 | 650 | 2.000 | 500 | | | | |
| 16 | 2.790 | 1.330 | 2.590 | 1.170 | 2.390 | 1.080 | 2.290 | 860 | 2.090 | 780 | 1.890 | 710 | 1.490 | 520 | | | | |
| 20 | 2.230 | 1.060 | 2.070 | 930 | 1.910 | 860 | 1.830 | 690 | 1.670 | 630 | 1.510 | 570 | 1.190 | 420 | | | | |
| Depth of cut | <table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>4D</td> <td>0,05D</td> </tr> </table> | | | | | | | | | | | | | | ap | ae | 4D | 0,05D |
| ap | ae | | | | | | | | | | | | | | | | | |
| 4D | 0,05D | | | | | | | | | | | | | | | | | |
| <p>1. Use a rigid and precise machine and holder. 2. The rotational speed is calculated by the median of the recommended cutting speed. Adjustment may be necessary depending on the rigidity of the workpiece fixture and machine. 3. Please use a suitable fluid with high smoke retardant properties. 4. During dry (no fluid) milling, please use air blow to remove disposable chips from the milling area and to eliminate chip packing. 5. Please use water-soluble coolant when machining stainless steel.</p> | | | | | | | | | | | | | | | | | | |

ae=0.1D • High efficiency side milling 4D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | | | | |
|---------------|---|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|------------|----|----|------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 6 | 10.600 | 2.670 | 8.500 | 1.970 | 6.900 | 1.600 | 6.600 | 1.400 | 6.100 | 1.290 | 5.600 | 1.190 | | | | |
| 8 | 8.000 | 2.020 | 6.400 | 1.480 | 5.200 | 1.210 | 5.000 | 1.060 | 4.600 | 980 | 4.200 | 890 | | | | |
| 10 | 6.400 | 1.920 | 5.100 | 1.330 | 4.100 | 1.070 | 4.000 | 950 | 3.700 | 890 | 3.300 | 790 | | | | |
| 12 | 5.300 | 1.590 | 4.200 | 1.090 | 3.500 | 910 | 3.300 | 790 | 3.000 | 720 | 2.800 | 670 | | | | |
| 16 | 3.980 | 1.690 | 3.180 | 1.190 | 2.590 | 970 | 2.490 | 870 | 2.290 | 800 | 2.090 | 730 | | | | |
| 20 | 3.180 | 1.350 | 2.550 | 960 | 2.070 | 780 | 1.990 | 700 | 1.830 | 640 | 1.670 | 580 | | | | |
| Depth of cut | <table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>4D</td> <td>0,1D</td> </tr> </table> | | | | | | | | | | | | ap | ae | 4D | 0,1D |
| ap | ae | | | | | | | | | | | | | | | |
| 4D | 0,1D | | | | | | | | | | | | | | | |

ae=0.15D • High efficiency side milling 4D

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | | | | |
|---------------|---|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|------------|----|----|--------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | | | |
| 6 | 7.200 | 1.670 | 6.100 | 1.290 | 4.500 | 950 | 4.000 | 770 | 3.400 | 650 | 2.900 | 560 | | | | |
| 8 | 5.400 | 1.250 | 4.600 | 980 | 3.400 | 720 | 3.000 | 580 | 2.600 | 500 | 2.200 | 430 | | | | |
| 10 | 4.300 | 1.200 | 3.700 | 890 | 2.700 | 650 | 2.400 | 530 | 2.100 | 460 | 1.800 | 400 | | | | |
| 12 | 3.600 | 1.010 | 3.100 | 740 | 2.300 | 550 | 2.000 | 440 | 1.700 | 370 | 1.500 | 330 | | | | |
| 16 | 2.690 | 1.080 | 2.290 | 800 | 1.690 | 590 | 1.490 | 480 | 1.290 | 420 | 1.090 | 330 | | | | |
| 20 | 2.150 | 860 | 1.830 | 640 | 1.350 | 470 | 1.190 | 390 | 1.040 | 340 | 880 | 260 | | | | |
| Depth of cut | <table border="1"> <tr> <td>ap</td> <td>ae</td> </tr> <tr> <td>4D</td> <td>≤0,15D</td> </tr> </table> | | | | | | | | | | | | ap | ae | 4D | ≤0,15D |
| ap | ae | | | | | | | | | | | | | | | |
| 4D | ≤0,15D | | | | | | | | | | | | | | | |

Milling | Solid carbide



CUTTING CONDITIONS

Milling | Endmills | Cutting conditions

AE-VMFE

Applies to square / radius type)

Side milling

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron SS400 • S55C • FC250 ~750N/mm ² | | Alloy Steel • Tool Steel SCM • SKS • SKD ~30HRC | | Prehardened Steel • Hardened Steel PX5 • NAK80 30~45HRC | | Stainless Steel SUS304 • SUS420 ≤200HB | | Precipitation Stainless Steel SUS630 | | Titanium Alloy Ti-6Al-4V | | Ni-Based Alloy Inconel 718 | |
|---------------|--|------------------------|---|------------------------|---|------------------------|--|------------------------|---|------------------------|-----------------------------|------------------------|-------------------------------|------------------------|
| | ∅ | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) | F (mm/min) | S (min ⁻¹) |
| 6 | 6.370 | 2.550 | 6.370 | 2.290 | 6.370 | 2.040 | 6.370 | 1.910 | 6.100 | 1.590 | 5.570 | 1.340 | 3.720 | 740 |
| 8 | 4.780 | 1.910 | 4.780 | 1.720 | 4.780 | 1.530 | 4.780 | 1.430 | 4.580 | 1.190 | 4.180 | 1.000 | 2.790 | 560 |
| 10 | 3.820 | 1.530 | 3.820 | 1.380 | 3.820 | 1.220 | 3.820 | 1.150 | 3.660 | 950 | 3.340 | 800 | 2.230 | 490 |
| 12 | 3.180 | 1.270 | 3.180 | 1.140 | 3.180 | 1.020 | 3.180 | 950 | 3.050 | 790 | 2.790 | 670 | 1.860 | 410 |
| 14 | 2.730 | 1.090 | 2.730 | 980 | 2.730 | 870 | 2.730 | 820 | 2.620 | 680 | 2.390 | 570 | 1.590 | 480 |
| 18 | 2.120 | 850 | 2.120 | 760 | 2.120 | 680 | 2.120 | 640 | 2.030 | 530 | 1.860 | 450 | 1.240 | 370 |
| 22 | 1.740 | 700 | 1.740 | 630 | 1.740 | 560 | 1.740 | 520 | 1.660 | 430 | 1.520 | 360 | 1.010 | 300 |

| | |
|----|------|
| ap | ae |
| 2D | 0,1D |

Cutting Condition Guide for Changes in Overhang Length

| Cutting Speed | Mild Steel • Carbon Steel • Cast Iron • Alloy Steel • Tool Steel (~750N/mm ² ~30HRC) | | | | Prehardened Steel • Hardened Steel • Stainless Steel 30~45HRC | | | | Titanium Alloy • Ni-Based Alloy Ti-6Al-4V - Inconel 718 | | | |
|---------------|--|------|--------------|---------|--|------|--------------|-------|--|------|--------------|---------|
| | Cutting Speed | Feed | Depth of cut | | Cutting Speed | Feed | Depth of cut | | Cutting Speed | Feed | Depth of cut | |
| | | | L/D | (m/min) | | | (mm/min) | ap | | | ae | (m/min) |
| 6 | 80% | 80% | 1,7D | 0,08D | 80% | 80% | 1,7D | 0,08D | 80% | 80% | 1,7D | 0,08D |
| 7 | 65% | 65% | 1,6D | 0,05D | 65% | 65% | 1,6D | 0,05D | 65% | 65% | 1,6D | 0,05D |
| 8 | 50% | 50% | 1,5D | 0,03D | 40% | 40% | 1,5D | 0,03D | 30% | 30% | 1,5D | 0,03D |

Milling | Solid carbide




CUTTING DATA

Suppression of Burrs

Great surface finish without vibration and minimal burrs.


| | | |
|---------------|------------------------------------|---------------------------|
| Tool | AE-VMS Ø 10 | Competitor Ø 10 |
| Work Material | SUS316 | |
| Cutting Speed | 69m/min (2.200 min ⁻¹) | |
| Feed Rate | 350mm/min (0,04mm/t) | |
| Depth of Cut | ap = 10mm | ap=5mm |
| Coolant | Water Soluble | |
| Machine | Vertical Machining Center | |
| M.R.R. | 35 cm ³ /min | 17,5 cm ³ /min |

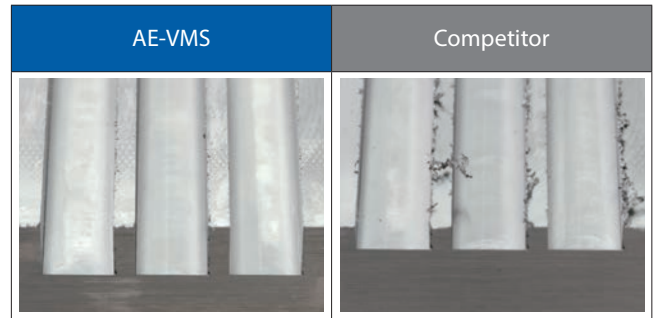

Stable Performance

Consistent tool wear with no chipping even in stainless steel slot milling.

| | |
|---------------|------------------------------------|
| Tool | AE-VMS Ø 10 |
| Work Material | SUS304 |
| Cutting Speed | 70m/min (2.250 min ⁻¹) |
| Feed Rate | 475mm/min (0,053mm/t) |
| Depth of Cut | ap = 10mm |
| Coolant | Water Soluble |
| Machine | Vertical Machining Center |

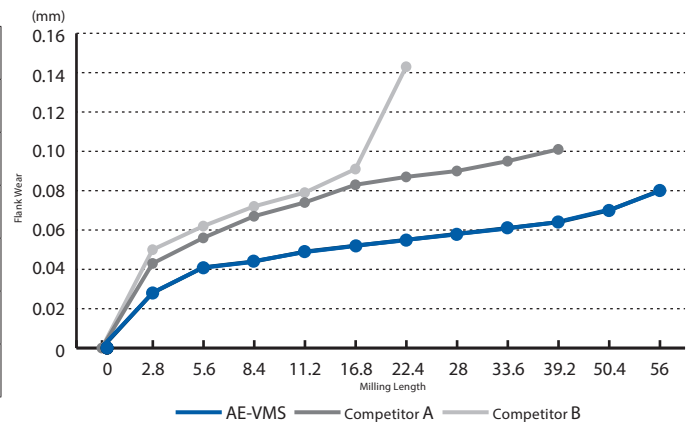


Cutting edge wear comparison



Stable performance

Stable performance even in slotting

| | |
|----------------|------------------------------------|
| Tool | AE-VMS Ø 6 X R1 |
| Work Material | SUS304 |
| Milling method | Slot milling |
| Cutting Speed | 80m/min (4.200 min ⁻¹) |
| Feed Rate | 830mm/min (0,049 mm/t) |
| Depth of Cut | ap = 3mm |
| Coolant | Water Soluble |
| Machine | Horizontal Machining Center |

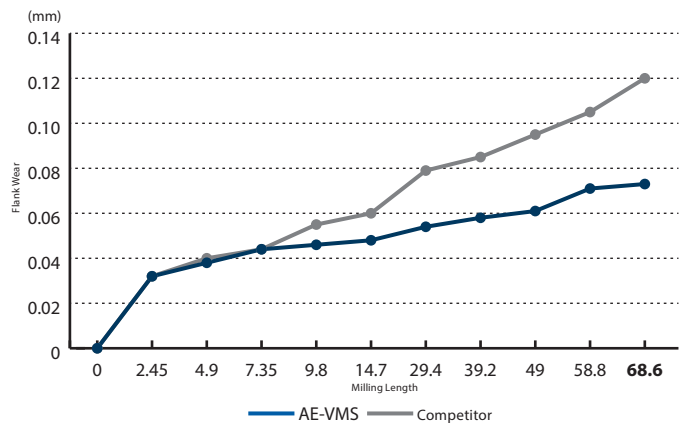

Wear comparison


Wear comparison after milling 68,6



High efficiency

Trouble-free chip evacuation even in high-speed slotting

| | |
|----------------|------------------------------------|
| Tool | AE-VMS Ø 10 X R1 |
| Work Material | SCM440 |
| Milling method | Slot milling |
| Cutting Speed | 90m/min (2.900 min ⁻¹) |
| Feed Rate | 660mm/min (0,057 mm/t) |
| Depth of Cut | ap = 10mm |
| Coolant | None |
| Machine | Vertical Machining Center |

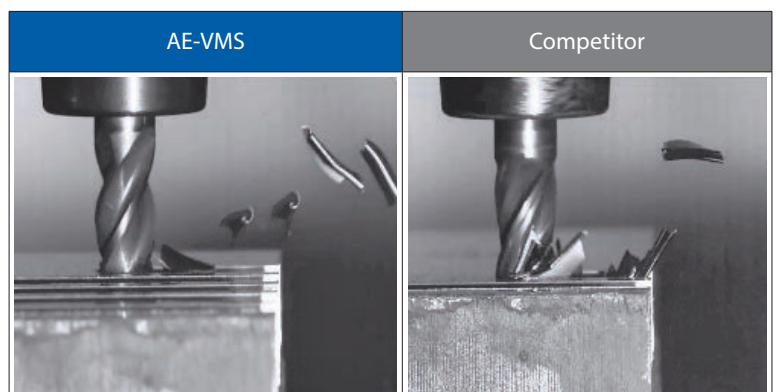


CUTTING DATA

Suppression of Burrs


Suppression of cutting heat generation minimizes tool wear

| | |
|---------------|-------------------------------------|
| Tool | AE-VMS Ø 6 |
| Work Material | SCM440 |
| Cutting Speed | 140m/min (7.500 min ⁻¹) |
| Feed Rate | 1.800mm/min (0,06mm/t) |
| Depth of Cut | ap = 9mm ae= 1,2mm |
| Coolant | Air Blow |
| Machine | Vertical Machining Center |

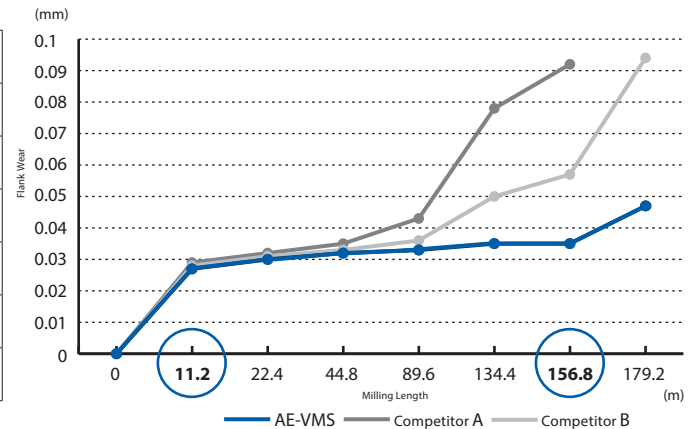

Surface roughness comparison

Surface roughness after milling 11,2m

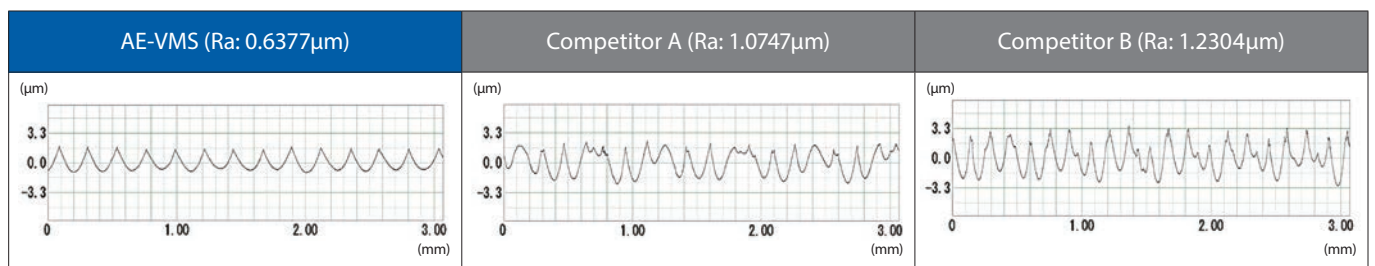

Tool condition comparison


Tool condition after milling 156,8m

| | Cutting Chips | Wear Comparison |
|--------------|---------------------------|---|
| AE-VMS | <p>Brown about 500°C</p> | <p>No Cutting Edge Recession</p> |
| Competitor A | <p>Purple about 600°C</p> | <p>Excessive Cutting Edge Recession</p> |
| Competitor B | <p>Blue about 700°C</p> | <p>Minimal Cutting Edge Recession</p> |



AE-VML: WITH CHIPBREAKER

Minimizes chipping with unique R profiles at the edge of the chipbreaker.

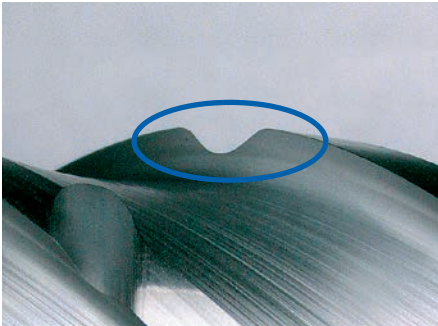

Troubled by long and stringy chip accumulation




Large chip accumulation can be problematic for long-hour and high chip removal side milling, trochoidal milling, and pocket milling with long flute length end mills.

Breaks chips into small pieces!

Enables continuous machine operation

The chipbreaker (-N) creates small chips that can be easily evacuated by air or cutting oil. For high-quality machined surfaces, we recommend the AE-VML square type without chipbreaker.

Milling | Solid carbide

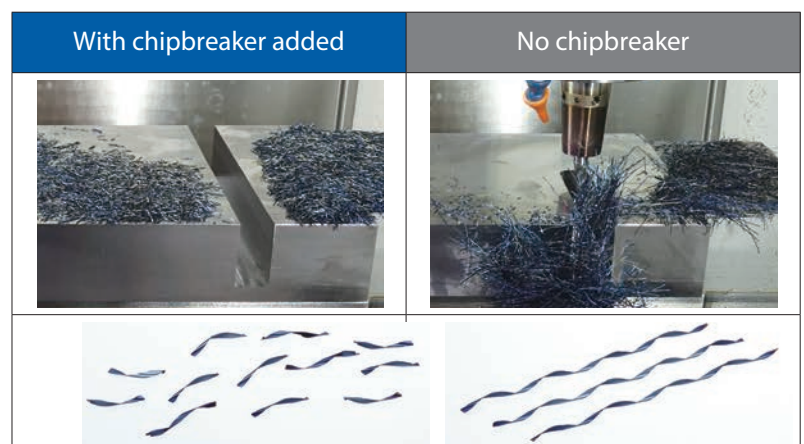


| | | | |
|-----------------------|---|---------------------|-----------------------------------|
| Tool | AE-VML $\phi 10 \times 40$ -N With chipbreaker | Feed Rate | 1,140mm/min 0.075mm/t |
| Work Material | NAK80(40HRC) | Depth of Cut | ap=40mm ae=0.5mm |
| Milling Method | Trochoidal | Coolant | Air blow |
| Cutting Speed | 120m/min 3,800min ⁻¹ | Machine | BT50 Vertical Machining Center |

CUTTING DATA


Stable performance

Stable performance even at 4D depth of cut

| | |
|----------------|------------------------------------|
| Tool | AE-VML Ø 10 x 40 |
| Work Material | S50C |
| Milling Method | Side milling |
| Cutting Speed | 130m/min (4,200min ⁻¹) |
| Feed Rate | 1.200mm/min (0,07mm/t) |
| Depth of Cut | ap=40mm ae=0.5mm |
| Coolant | Air Blow |
| Machine | Horizontal Machining Center |

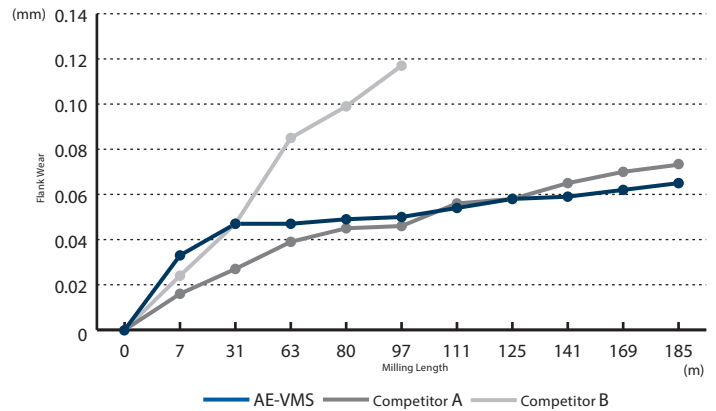


Wear comparison of the peripheral cutting edge

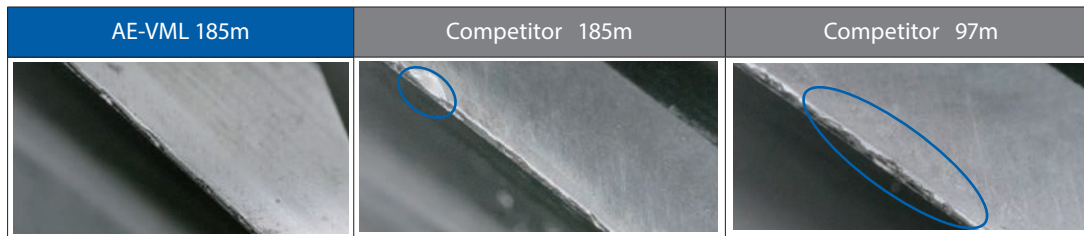

Long tool life

DUARISE coating greatly reduces tool wear progression even with the use of water-soluble coolant.


| | |
|----------------|------------------------------------|
| Tool | AE-VML Ø 10 x 31 |
| Work Material | SCM440(30HRC) |
| Milling Method | Side milling |
| Cutting Speed | 180m/min (5.700min ⁻¹) |
| Feed Rate | 1.400mm/min (0,06mm/t) |
| Depth of Cut | ap=25mm ae=1mm |
| Coolant | Water Soluble |
| Machine | Vertical Machining Center |

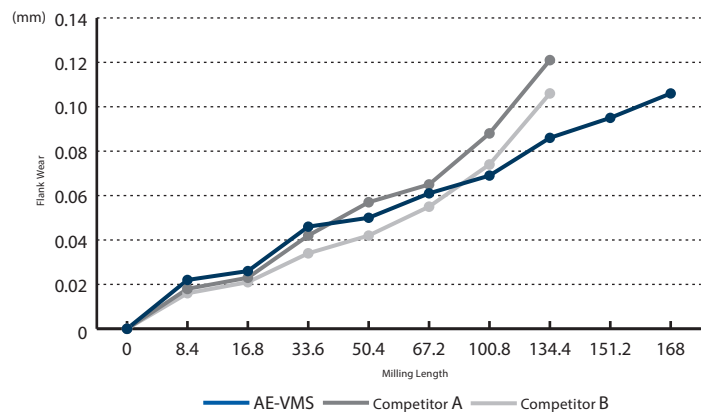

Milling | Solid carbide



Wear comparison of the peripheral cutting edge

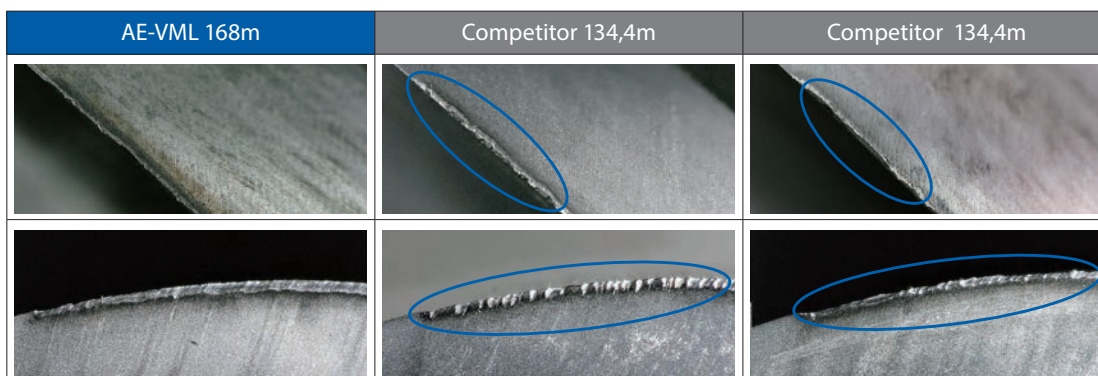

SWEDEN

Branch office of OSG SCANDINAVIA
Singelgatan 7
212 28 Malmö
Sweden
Tel: +46 40 41 22 55
osg@osg-scandinavia.com

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde
Denmark
Tel: +45 46 75 65 55
osg@osg-scandinavia.com

OSG NETHERLANDS

Bedrijfsweg 5
3481 MG Harmelen
The Netherlands
Tel: +31 348 44 2764
Fax: +31 348 44 2144
info@osg-nl.com

OSG UK

Kelsey Close, Attleborough Fields Ind Est,
CV11 6RS, Nuneaton
United Kingdom
Tel: +44 1827 720 013
sales@osg-uk.com

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord
Belgium
Tel: +32 10 23 05 07
Fax: +32 10 23 05 51
info@osgeurope.com

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord
Belgium
Tel: +32 10 23 05 11
Fax: +32 10 23 05 31
info@osg-belgium.com

OSG IBÉRICA

Bekolarra 4
E - 01010 Vitoria-Gasteiz
Spain
Tel: +34 945 242 400
Fax: +34 945 228 883
osg.iberica@osg-ib.com

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte
France
Tel: +33 1 49 90 10 10
Fax: +33 1 49 90 10 15
sales@osg-france.com

OSG ITALY

Via Ferrero, 65 A/B
I - 10098 Rivoli
Italy
Tel: +39 0117705211
Fax: +39 0117705215
info@osg-italia.it





CZECH REPUBLIC, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.
Slovakia, organizačná zložka
Račianska 22/A, Bratislava 831 02
Slovakia
Tel.: +421 24 32 91 295
info@osgeurope.com

OSG POLAND

ul. Spółdzielcza 57
05-074 Halinów
Polska
Tel: +22 760 82 71
Mob. +48 570 677 711
osg@osg-poland.com

OSG RUSSIA

Butlerova street, 17B, office 5069
117342 Moscow
Russia
Tel: +7 (495) 150 41 54
info@osg-russia.com

ROMSAN INTERNATIONAL CO. SRL

Reprezentant Exclusiv OSG
25C, Bucuresti-Magurele Street
051431 Bucuresti
România
Tel: +40 21 322 07 47
Fax: +40 21 321 56 00
romsan.int@romsan.ro

OSG TURKEY

Rami Kişla Cad.No:56 Eyüp
Istanbul 34056
Turkey
Tel: +90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
Schweiz
Tel.: +41 44 802 15 15
Fax: +41 44 802 15 95
info@vb-tools.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen
Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de



shaping your dreams

OSG EUROPE LOGISTICS

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 07
Fax: +32 10 23 05 51
info@osgeurope.com

OSG POLAND Sp. z.o.o.

Spółdzielcza 57
05-074 Halinów - Poland
Tel: +22 760 82 71
Fax: +22 760 82 71
osg@osg-poland.com

OSG TURKEY

Rami Kışla Cad.No:56 Eyüp
Istanbul 34056 - Turkey
Tel:+90 212 565 24 00
Fax: +90 212 565 44 00
info@osg-turkey.com

OSG BELUX

Avenue Lavoisier 1
B-1300 Z.I. Wavre - Nord - Belgium
Tel: +32 10 23 05 11
Fax: +32 10 23 05 31
info@osg-belgium.com

OSG GERMANY

Karl-Ehmann-Str. 25
D - 73037 Göppingen - Germany
Tel: +49 7161 6064 - 0
Fax: +49 7161 6064 - 444
info@osg-germany.de

ROMSAN INTERNATIONAL CO. SRL

Reprezentant Exclusiv OSG
25C, Bucuresti-Magurele Street
051431 Bucuresti - România
Tel: +40 21 322 07 47
Fax: +40 21 321 56 00
romsan.int@romsan.ro

OSG FRANCE

Parc Icade, Paris Nord 2
Immeuble "Le Rimbaud"
22 Avenue des Nations
CS66191 - 93420 Villepinte - France
Tel: +33 1 49 90 10 10
Fax: +33 1 49 90 10 15
sales@osg-france.com

OSG SCANDINAVIA

(For Scandinavian countries)
Langebjergvaenget 16
4000 Roskilde - Denmark
Tel: +45 46 75 65 55
Fax: +45 46 75 67 00
osg@osg-scandinavia.com

AUSTRIA

Branch office of OSG GERMANY
Messestraße 11
A-6850 Dornbirn
Tel: +49 7161 6064-0
Fax: + 49 7161 6064-444
info@osg-germany.de

OSG NETHERLANDS

Bedrijfsweg 5 - 3481 MG Harmelen
Tel: +31 348 44 2764
Fax: +31 348 44 2144
info@osg-nl.com

SWEDEN

Branch office of OSG SCANDINAVIA
Singelgatan 7
212 28 Malmö - Sweden
Tel: +46 40 41 22 55
osg@osg-scandinavia.com

OSG ITALIA

Via Ferrero, 65 A/B3
I - 10098 Rivoli - Italy
Tel: +39 0117705211
Fax: +39 0117705215
info@osg-italia.it

OSG UK

Kelsey Close, Attleborough Fields Ind Est,
CV11 6RS, Nuneaton, United Kingdom.
Tel: +44 1827 720 013
uk_sales@osg-uk.com

OSG IBERICA

Bekolarra 4
E - 01010 Vitoria-Gasteiz - Spain
Tel: +34 945 242 400
Fax: +34 945 228 883
osg.iberica@osg-ib.com

Vischer & Bolli AG

Machining and Workholding
Im Schossacher 17
CH-8600 Dübendorf
T +41 44 802 15 15
F +41 44 802 15 95
info@vb-tools.com

CZECH, SLOVAKIA, HUNGARY

OSG Europe Logistics S.A.
Slovakia organizacna zlozka
Racianská 22/A, SK-83102 Bratislava
Slovakia
Tel. +421 24 32 91 295
Orders-osgsvk@osgeurope.com

RUSSIA

Butlerova street, 17B, office 5069
117342 Moscow - Russia
Tel: +7 (495) 150 41 54
info@osg-russia.com

OSG EUROPE LOGISTICS S.A.

06/2022 - All rights reserved. © OSG Europe 2022.

The contents of this catalogue are provided to you for viewing only. They are not intended for reproduction either in part or in whole in this or other medium. They cannot be copied, used to create derivation work or used for any reason, by means without the express, written permission of the copyright owner. If prices are stated, they are netto unit-prices and any eventual tax(es) have to be added. The company is not responsible for any printing error in technical, price and/or any other data.

Tool specifications subject to change without notice.

www.osgeurope.com